


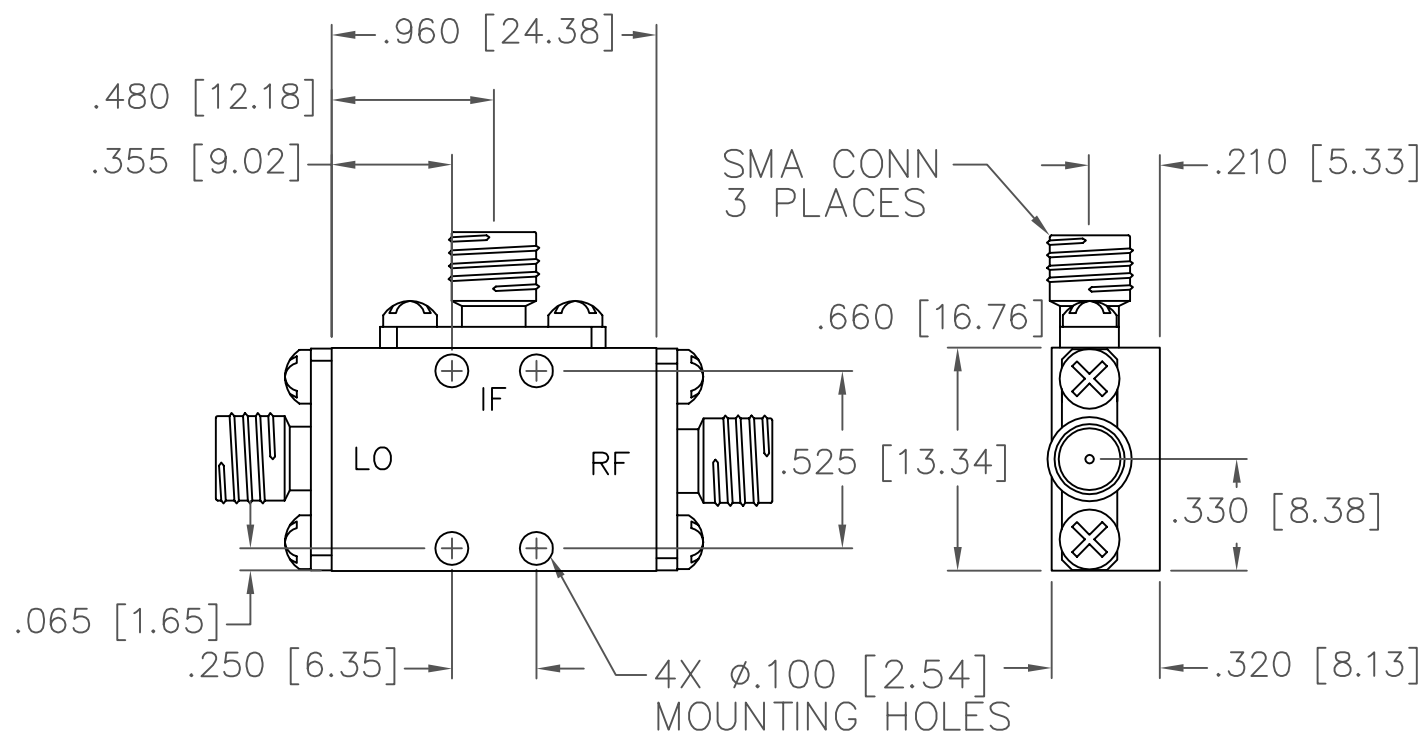

Electrical:

RF:	4.0 - 12.4 GHz
LO:	4.0 - 12.4 GHz
IF:	DC - 2.0 GHz
LO Drive:	10 dBm Typ
Conversion Loss:	7.0 dB Typ
Isolation L-R:	25 dB Min
Isolation L-I:	20 dB Min

Specifications:

SigaTek

423 Black Oak Ridge Rd.
Wayne, NJ 07470
Ph: 973-706-8475, Fax : 973-832-4435
www.sigatek.com

SM1510

Microwave Mixer

Dimensions are in inches and (mm)
Decimal Tolerance:
2 place ± 0.020
3 place ± 0.010

CAGE CODE : 69UC1

SCALE:N/A

REV
N/A

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing is prohibited.