




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

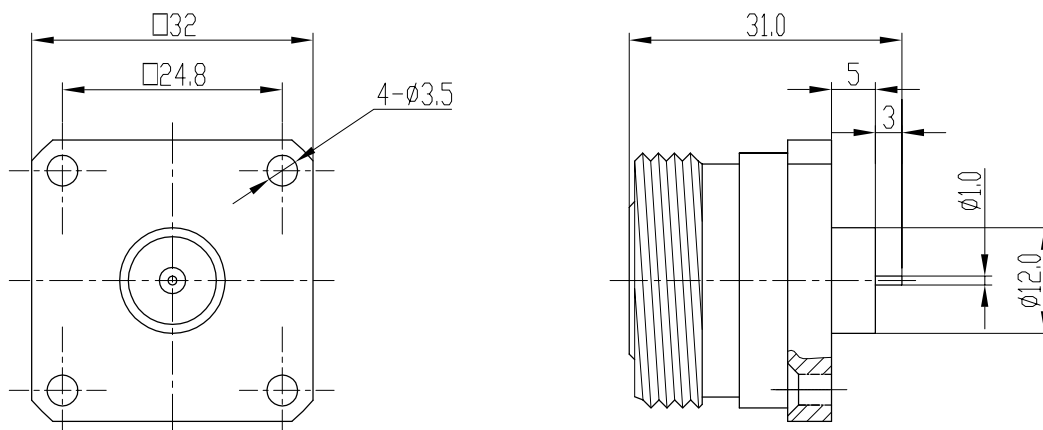

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~7.5GHz
3. Contact resistance
Center conductor: $\leq 1.0\ \text{m}\Omega$
Out conductor: $\leq 0.5\ \text{m}\Omega$
4. Insulation resistance: $\geq 10000\ \text{M}\Omega$
5. Insulator withstanding: 4000V
6. Durability: 500cycles

Application: IEC 60169-4

Material & Finishing

1. Center contact :
Female: phosphor bronze, gold or silver plated
2. Flange body: brass, nickel plated
3. Insulators: PTFE


主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~7.5GHz
3. 接触电阻:
中心导体: $\leq 1.0\ \text{m}\Omega$
外导体: $\leq 0.5\ \text{m}\Omega$
4. 绝缘电阻: $\geq 10000\ \text{M}\Omega$
5. 介质耐压: 4000V
6. 插拔次数: 500次

执行标准: IEC 60169-4

材料和镀层

1. 中心接触件:
插孔: 锡磷青铜, 镀金或镀银
2. 法兰壳体: 黄铜, 镀镍
3. 绝缘子: 聚四氟乙烯

		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±	
		1.5:1			
		NAME	DATE		L29-KFD RF COAXIAL CONNECTOR
DRAWN					
CHECKED					
APPROVED					
西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.					

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO., LTD.