| REVISIONS | | | | |
|---|---|---|---|---|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |

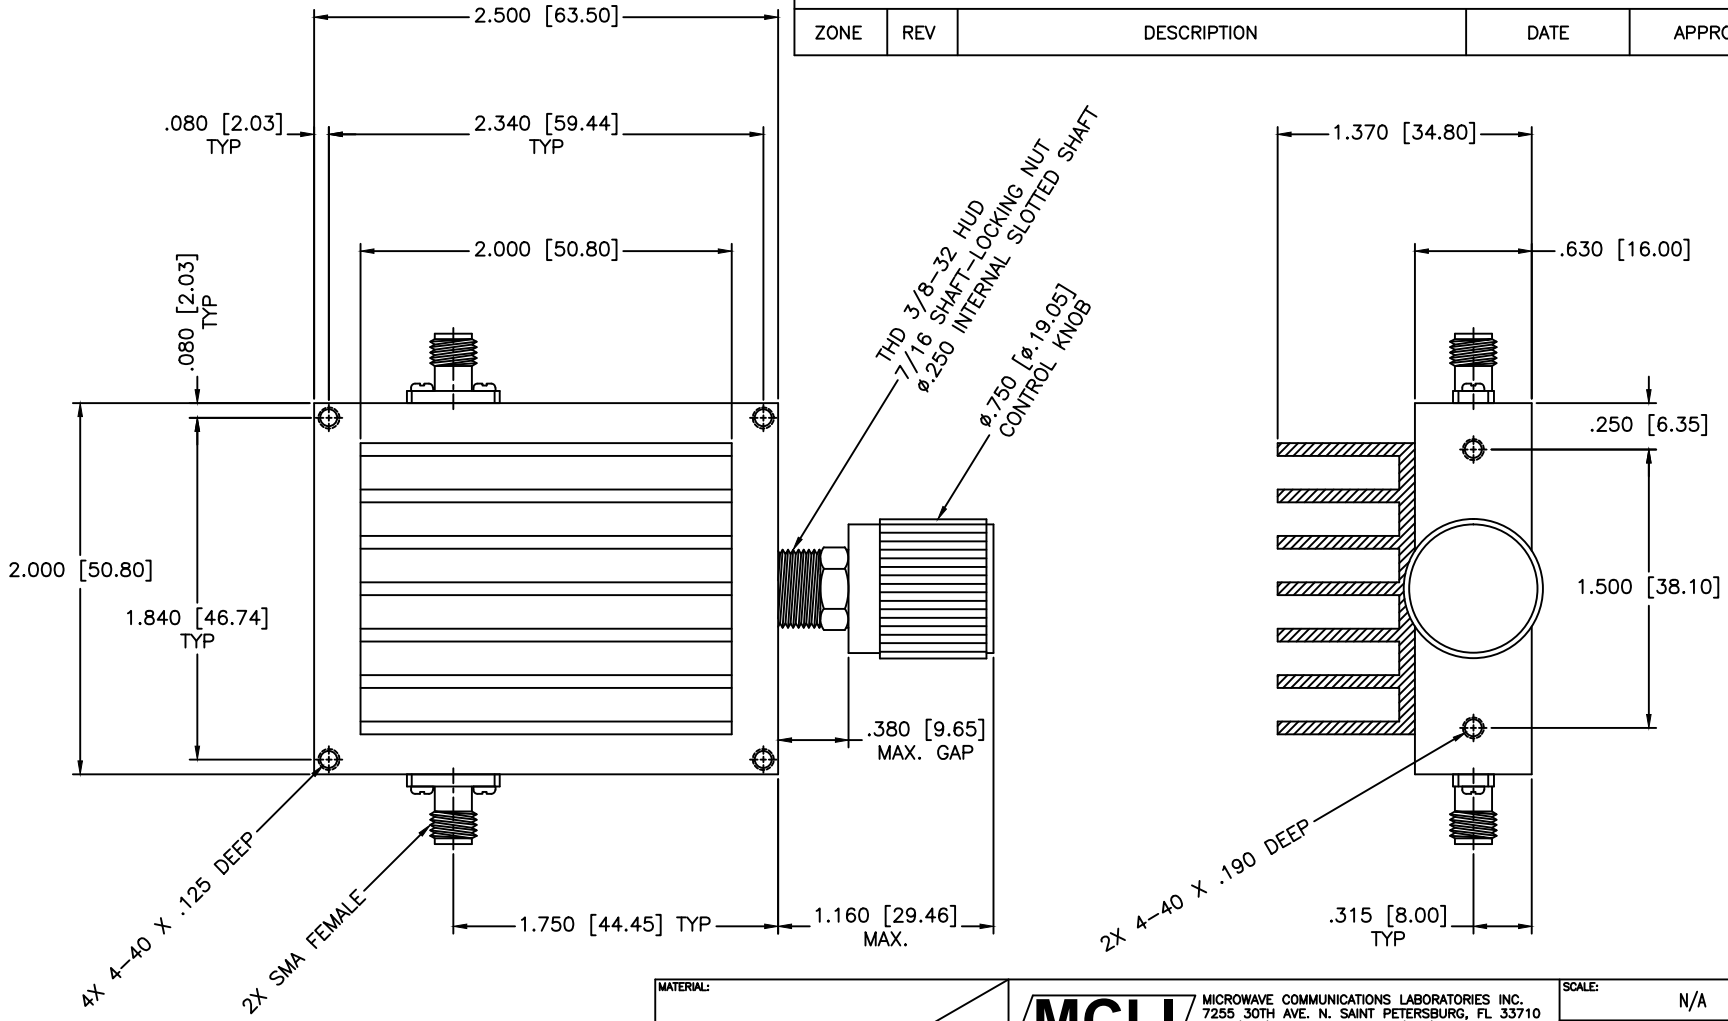


SPECIFICATION

Frequency Range: 0.8–1.6 GHz
Attenuation: 10dB
Insertion Loss: 0.5 Max.
VSWR: 1.50:1 Max.
RF Power: 50W Average, 5kW Peak

MATERIAL:

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.015
ANGLE: ±1/2°

DRAWING TITLE: CONTINUOUSLY VARIABLE ATTENUATOR, HIGH POWER

PART NO. HA50-2-10

DRAWN: Paiboon Luekhamhan DATE: 02-10-2011

APPROVED: T. Nguyen DATE: 02-10-2011

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

CAGE CODE: 0D2L5
SIZE: A
REV: N/A
DO NOT SCALE THE DRAWING
DWG NO. 85491