

11SB10-2050/X1300-O/O 1.4 GHz to 2.7 GHz Bandpass Filter

◆ Features:

- SMA Connectors
- Low Loss
- Plated Thru Hole Board
- Suspended Substrate Technology


◆ Specifications:

Bandwidth		
@ 1.4 GHz to 2.7 GHz:	1.0 dB	
Insertion Loss		
@ f_0 :	<0.6 dB	
VSWR		
@ 1.4 GHz to 2.7 GHz:	1.8:1	
Stopband		
@ 0.9 GHz & 3.5 GHz:	>40 dB	


Shock:	20 G's, 1/2 Sine, 11Ms
Vibration:	10 G's, 10 Hz - 2000 Hz
Temperature:	-55° C to 85° C
Rel. Humidity:	0 - 95%

◆ Applications:

- Amateur Radio
- Mobile

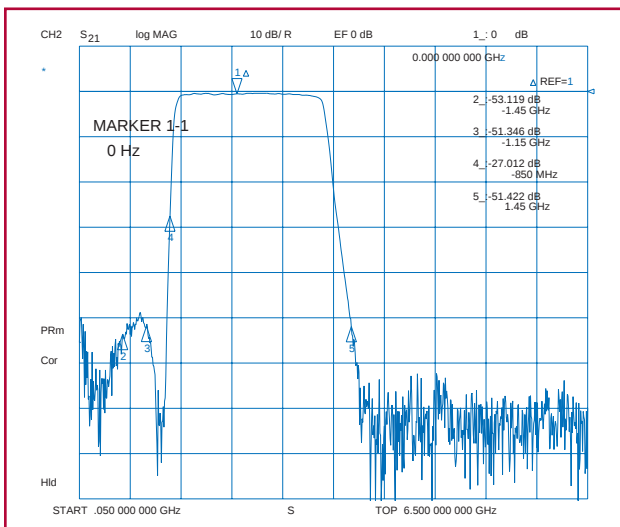

Amplitude

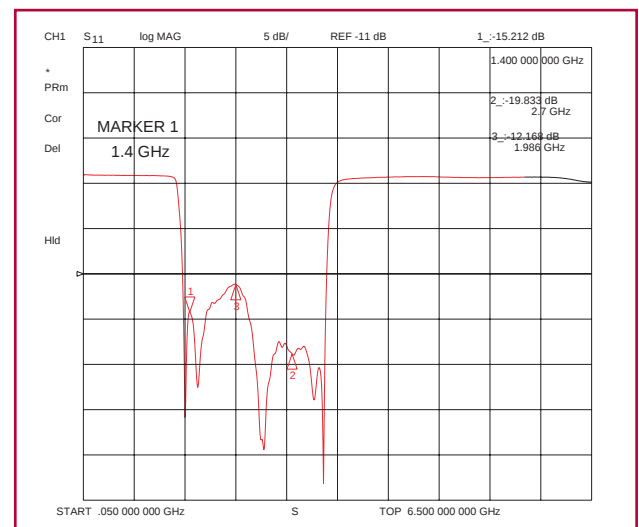

VSWR

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

