

Coaxial High Pass Filter

50Ω 90 to 2000 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- rugged shielded case
- other standard and custom SHP models available with wide selection of fco

Applications

- lab use
- transmitters/receivers
- radio communications

SHP-100+
SHP-100



CASE STYLE: FF99

Connectors	Model	Price	Qty.
SMA	SHP-100(+)	\$38.95 ea.	(1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

High Pass Filter Electrical Specifications

STOPBAND (MHz)	fco (MHz) Nom.	PASSBAND (MHz)	VSWR (:1)
(loss > 40 dB)	(loss 3 dB)	(loss < 1 dB)	Stopband Typ. Passband Typ.
DC-40	40-55	82	17 1.5


Outline Drawing

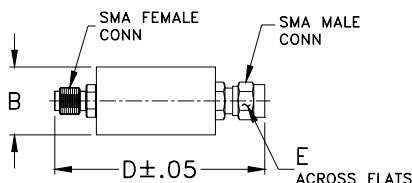


Outline Dimensions (inch mm)

B	D	E	wt
.67	1.98	.312	grams
17.02	50.29	7.92	42.0

typical frequency response





electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
$\bar{x}$	σ			
0.30	89.11	2.62	31.00	8.89
8.00	99.03	2.59	39.00	6.70
15.00	99.15	9.35	46.00	3.14
23.00	85.95	3.83	54.00	7.36
31.00	70.59	1.33	62.00	10.03
39.00	57.79	1.32	70.00	15.90
46.00	47.39	1.59	71.00	17.05
54.00	35.98	1.77	72.00	18.27
62.00	25.00	2.07	73.00	19.57
70.00	14.11	2.38	74.00	20.91
74.00	8.90	2.38	78.00	25.23
78.00	4.58	1.93	82.00	24.35
80.00	3.05	1.49	84.00	22.20
82.00	1.97	1.01	90.00	15.92
83.00	1.59	0.78	90.00	15.92
85.00	1.07	0.43	90.00	15.92
90.00	0.60	0.07	90.00	15.92
195.00	0.20	0.02	195.00	0.70
305.00	0.26	0.03	305.00	0.55
635.00	0.23	0.02	635.00	0.47
745.00	0.22	0.01	745.00	0.44
855.00	0.24	0.01	855.00	0.38
1075.00	0.21	0.01	1075.00	0.42
1180.00	0.19	0.01	1180.00	0.37
1290.00	0.23	0.01	1290.00	0.34
1400.00	0.24	0.02	1400.00	0.33
1510.00	0.24	0.02	1510.00	0.31
1730.00	0.28	0.03	1730.00	0.31
1840.00	0.27	0.03	1840.00	0.29
2060.00	0.21	0.02	2060.00	0.36
			2275.00	0.34
			2495.00	0.33

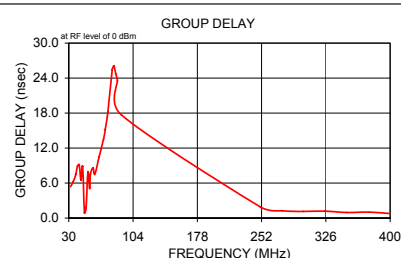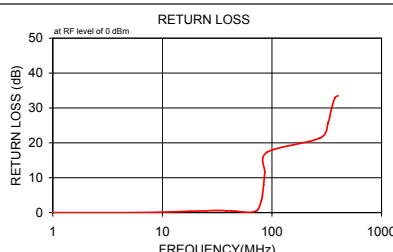

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M106005
SHP-100
090821