REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

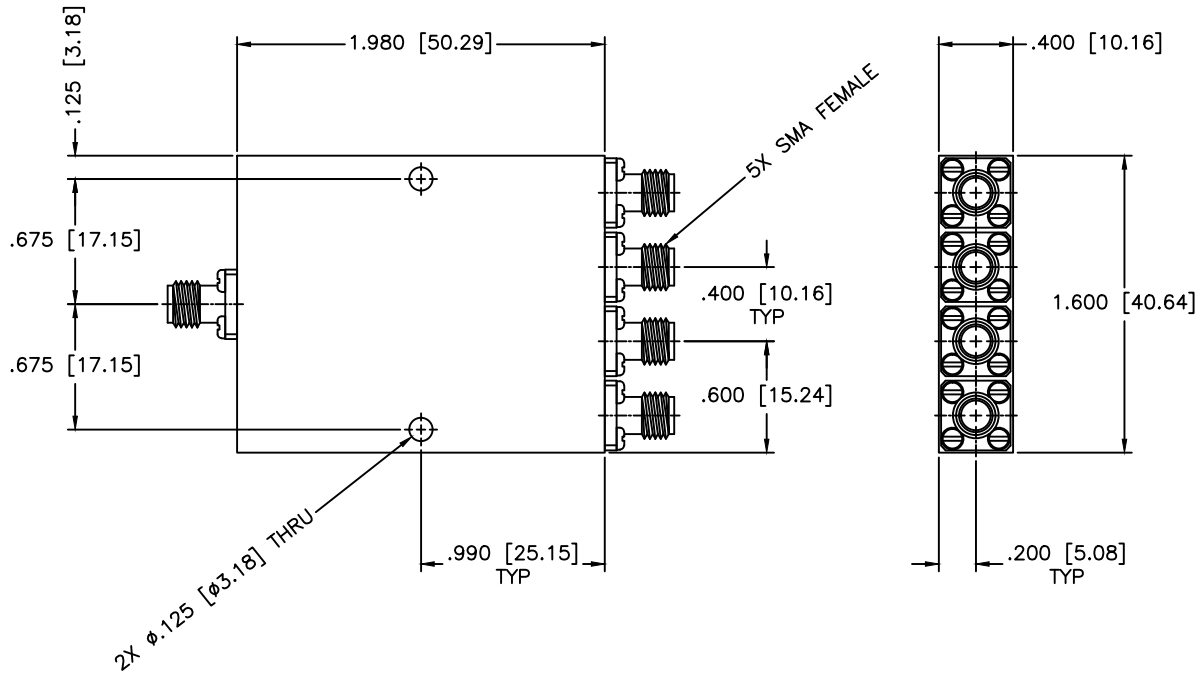

SPECIFICATIONS

Frequency Range: 10–26.5 GHz
Insertion Loss: 2.4dB Max.
Isolation: 18dB Min.
VSWR Input/Output: 1.60:1/1.60:1 Max.
Amplitude Balance: ±0.5dB Max.
Phase Balance: ±6 Deg. Max.
Power: 20W (Load VSWR @ 1.2)

MATERIAL:

DRAWN: Paiboon Luekhamhan DATE: 11-02-2012

APPROVED: T. Nguyen DATE: 11-02-2012

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

DRAWING TITLE: 4-WAY POWER DIVIDER

PART NO. PS4-208

CAGE CODE: 0D2L5

SIZE: A REV: N/A

DO NOT SCALE THE DRAWING

DWG NO. 86182