

TERMINATIONS

BNC

DC - 4 GHz
50 WATTS



MODELS: 3114BM, 3114BF

SPECIFICATIONS:



Electrical:

Frequency Range _____ DC – 4 GHz
VSWR _____ 1.25:1 Max
Impedance _____ 50 Ohms
Input Power _____ 50 Watts Avg. @ +25°C
(Derated Linearly to 10 Watts @ +125°C)
Peak Power _____ 4 kW Max. @ +25°C
(5uSec Pulse, .05% Duty Cycle)
Operating Temp Range _____ -55°C to +125°C


Mechanical:

BNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348
Housing _____ Anodized Aluminum
Conductors _____ Gold Plated Beryllium Copper

Model Number: **3114BM**
BNC Male Connector

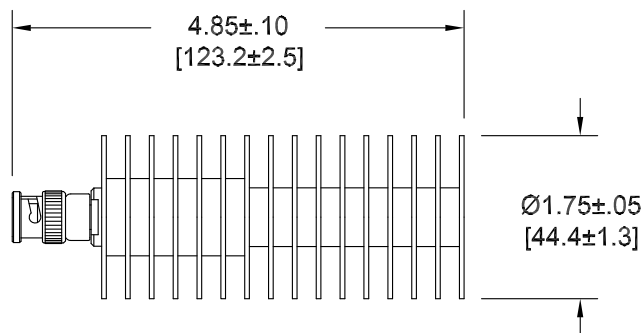

Model Number: **3114BF**
BNC Female Connector

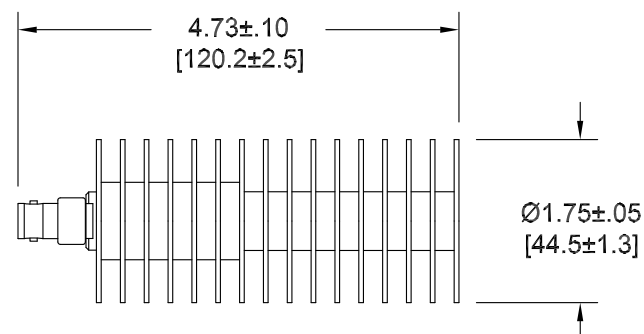

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

Contact factory for technical specifications before purchasing or use. 3114B; REV A
300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com