


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

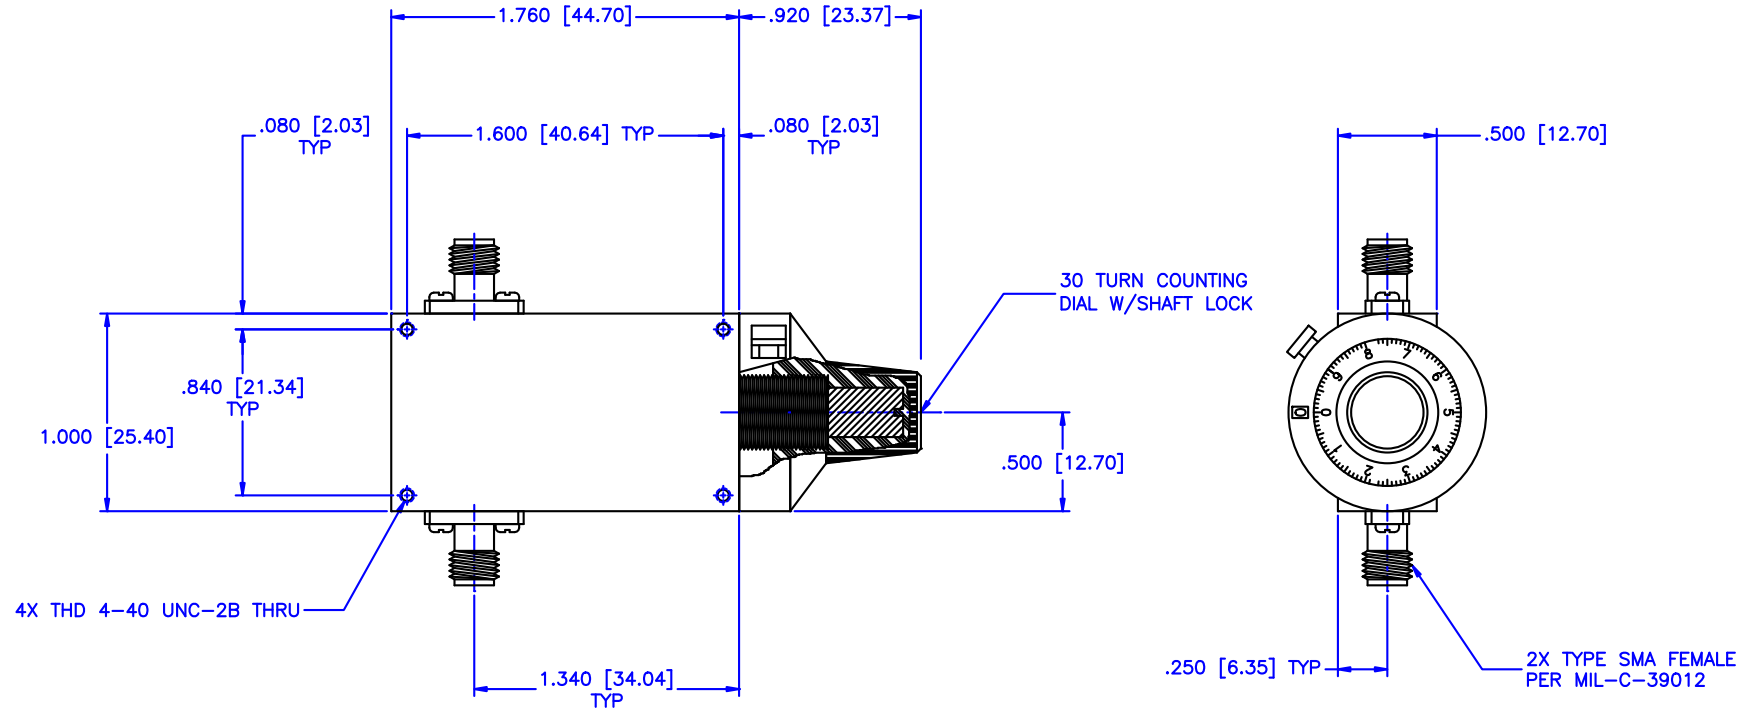

SPECIFICATIONS

Frequency Range: 4–12.4 GHz
 Attenuation: 10dB
 Insertion Loss: 0.5 Max.
 VSWR: 1.50:1 Max.
 Flatness: ± 1.0 dB
 RF Power: 7W Average, 3kW Peak

Environmental

Operating Temperature: -55°C to $+110^{\circ}\text{C}$
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 25,000ft Operating
 40,000 ft. Survival

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	
				N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^{\circ}$		DRAWING TITLE:			
		CONTINUOUSLY VARIABLE ATTENUATOR WITH DIAL			
DRAWN:		DATE:		PART NO.	
Paiboon Luekhamhan		02-10-2011		CA30-10/D	
APPROVED:		DATE:		CAGE CODE:	SIZE: A
T. Nguyen		02-10-2011		0D2L5	REV: A
				DWG NO.	
				85479	

THIRD ANGLE PROJECTION

DO NOT SCALE THE DRAWING