


**Tolerances**  
 1-20=+/-0.2  
 20-30=+/-0.3  
 30-40=+/-0.4  
 40-50=+/-0.5  
 50-100=+/-0.75  
 100-300=+/-1.5  
 Angles=+/-1  
**Dimensions are in Millimeters**

Revisions Description/Approved/Date	Approved M.H.	Date
	Checked M.H.	Date
	Drawn K.R.E.	Date 02/17/99
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike		

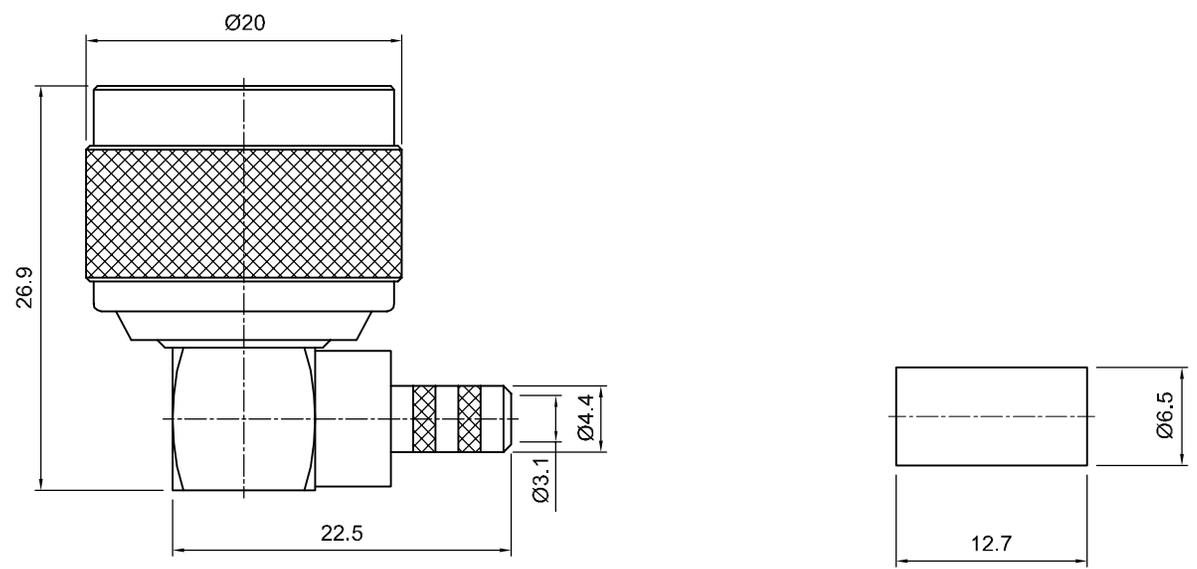

ITEM	MATERIAL	FINISH	Lighthouse Technologies, Inc.		
Connector Body	Brass, Note 1	Nickel, Note 9	 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: <b>LTI-NLM11NT-142</b>	Description	
Center Contact: Male	Brass, Note 1	Gold, Note 11		N right angle crimp plug for RG-142 cable.	
Insulation	Teflon, Note 5	None		Nickel plated brass body, Teflon dielectric.	
Ferrule	Annealed Copper, Note 7	Same as body	Scale	Drawing No.	File Name
Gasket	--	--	1:1	LTI-NLM11NT-58	NLM11NT-142
Hex Nut	--	--			
Lock Washer	--	--			