



MECHANICAL
 CONTACT: BREAK BEFORE MAKE
 ACTUATOR: LATCHING
 SWITCHING SPEED: 20 mSEC MAX

ELECTRICAL
 ACTUATOR VOLTAGE: 28.0±3.0 Vdc
 ACTUATOR CURRENT: 0.350 A MAX @ 28.0 Vdc
 POWER HANDLING: 350 WCW @ 1.0 GHz
 IMPEDANCE: 50 OHMS

ENVIRONMENTAL
 OPERATING TEMP: -54°C to +90°C
 SINE VIBRATION: 30 G'S rms
 LIFE : 1,000,000 CYCLES
 RANDOM VIBRATION: 20 G'S rms

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATION:
 FREQUENCY RANGE (GHz): DC-2.0
 VSWR (Max.): 1.20:1
 INSERTION LOSS (dB): 0.20
 ISOLATION (dB): 90

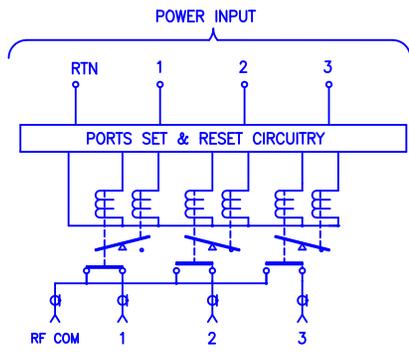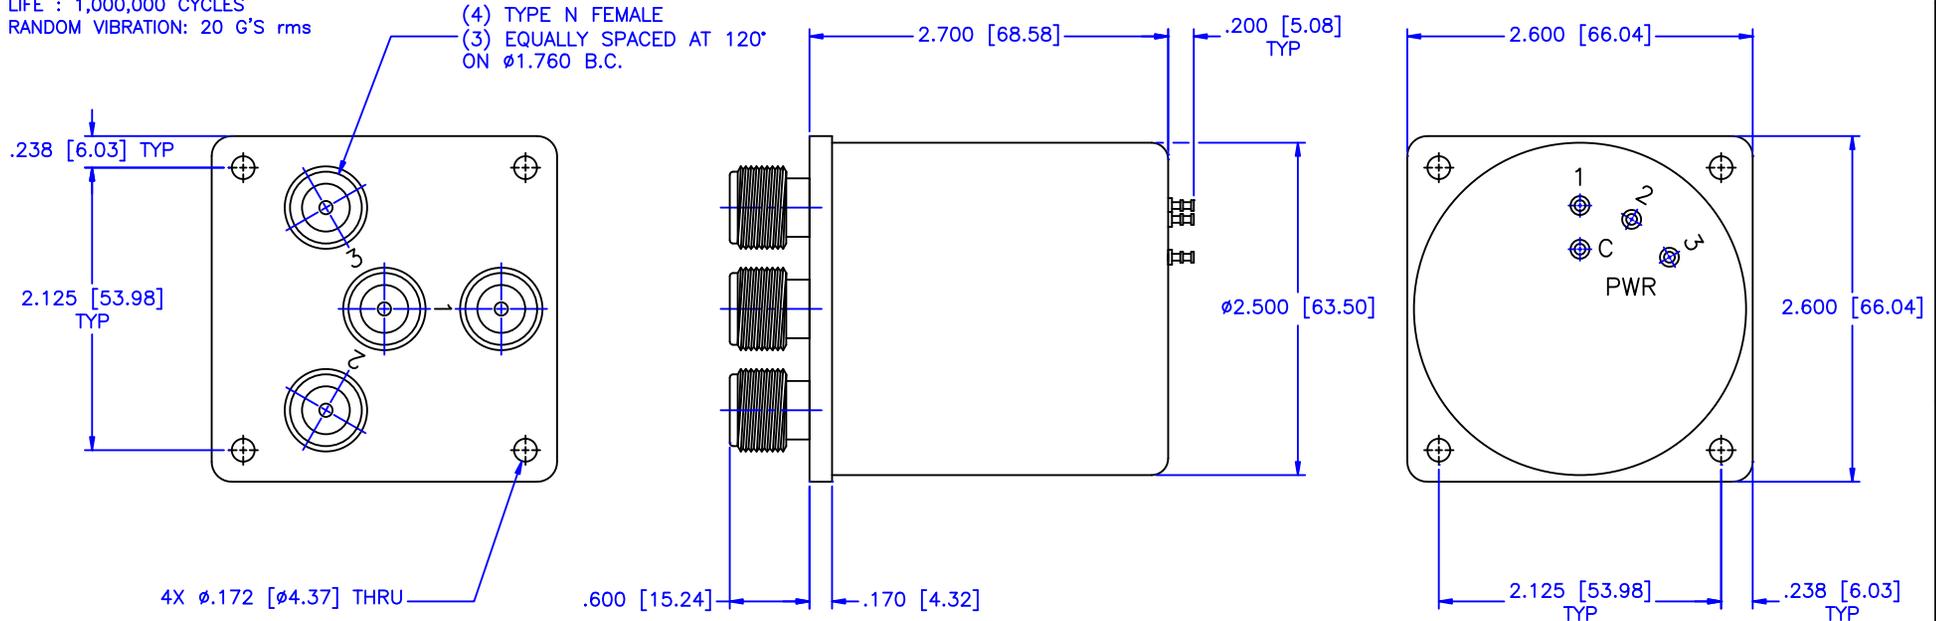

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-02-2009	DRAWING TITLE: ELECTROMECHANICAL SWITCHES
APPROVED: T. Nguyen		DATE: 03-02-2009	PART NO. D3-2-L
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SCALE: N/A
		SIZE: N/A	REV: B
		DO NOT SCALE THE DRAWING	DWG NO. 84255