


Uncontrolled Drawing

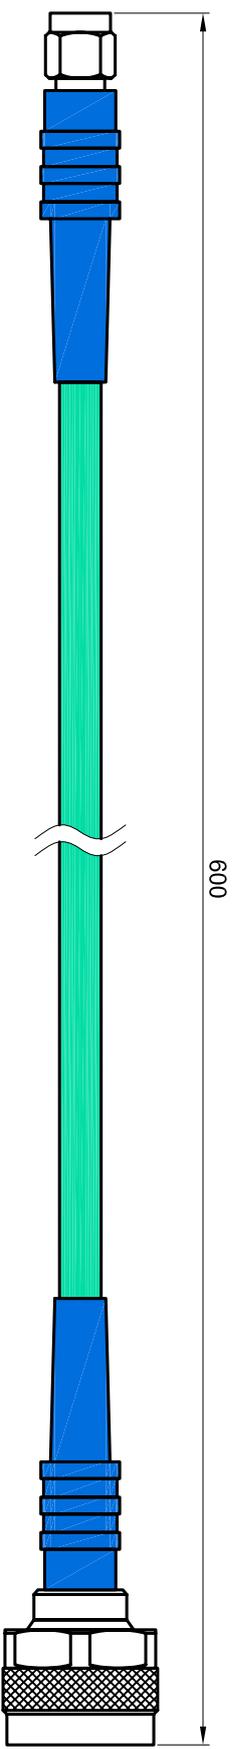

Type SMA male

Type N male

Specification:

1. Model: MC06-01-03-600
2. Nominal Impedance: 50Ω
3. Frequency Range: DC-6GHz , up to 8GHz
4. Insertion Loss: 0.60dB@DC-1GHz, 0.90dB@1-3GHz, 1.30dB@3-6GHz, 1.45dB@6-8GHz
5. VSWR: 1.15@DC-1GHz, 1.20@1-3GHz, 1.25@3-6GHz, 1.30@6-8GHz
6. Length: 0.6m
7. Connector: SMA male to N male
8. Power CW: 166W@6GHz

序号/Item	数量/Qty	规格/Spec. 零件, 材料/Part, Material	图号/Draw No.	版本/Version
物料/Material	数量/Qty	检查/Checked	文件名称/FILENAME	日期/Date
DESIGNED_ZYY_SJH		CHECKED_ZH		10/12/7
BXT Technologies			Test Cable Assembly	
Tel:0591-83789500			MC06-01-03-600	
www.bxt-technologies.cn			版本/Version	
RF Technologies			EDITION	
			505.0309	
			数量/Qty	
			1/1	
			图号/Draw No.	
			505.0309	
			版本/Version	
			1/1	