

SMP-F .086 CABLE SWEPT CONNECTOR

SC5235


SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-40 GHZ
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL BODY: BeCu
 CENTER CONTACTS: BeCu
 PLATING: Au PER MIL-G-45204
 INSULATOR: PTFE
 INTERFACE: SMP DESC 94007
 ROHS COMPLIANT

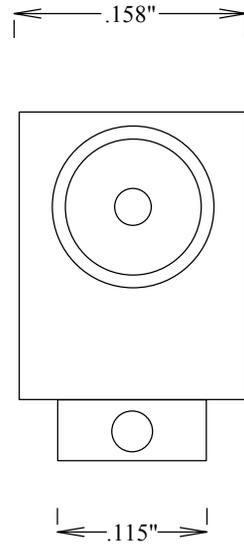

MMSP-F
 DESC 94008

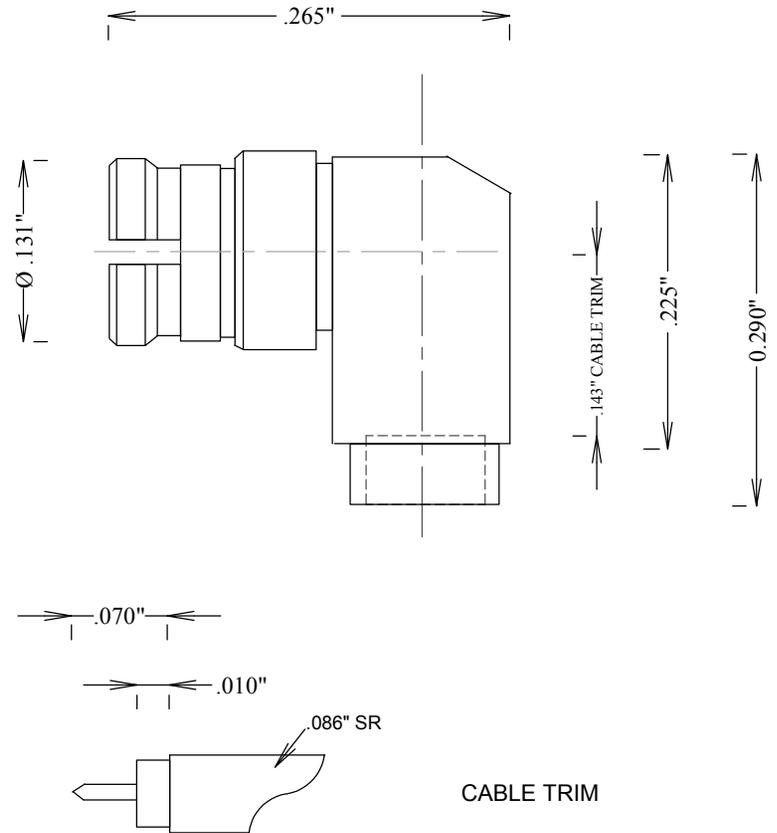

CABLE TRIM

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMP-F .086 CABLE SWEPT CONNECTOR

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC5235	--

SCALE	SHEET
-------	-------