


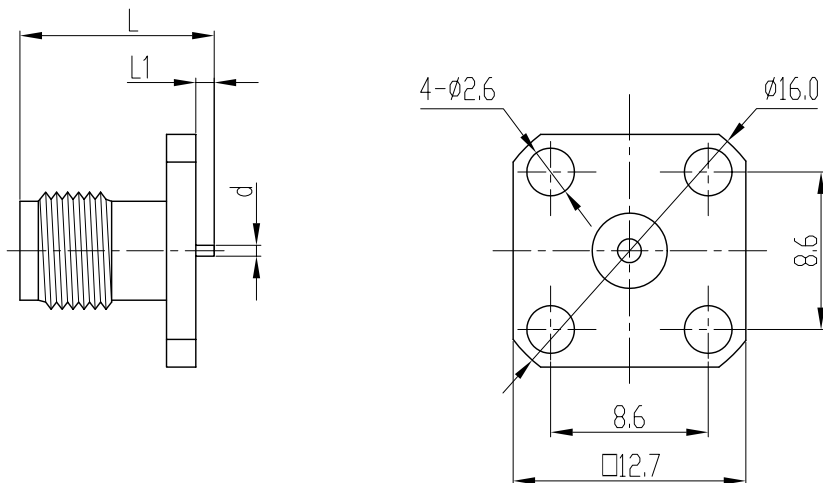

产品型号 type	L	L1	L2	备注 remark
SMA-KFD48A	10.3	0.9	φ0.6	
SMA-KFD88	14.1	1.5	φ0.5	
SMA-KFD380	10.3	0.9	φ0.6	
SMA-KFD380G	10.3	0.9	φ0.6	body, stainless steel(壳体, 不锈钢)

Electrical Characteristics:

- Characteristic Impedance: 50Ω
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: $\leq 3.0 \text{ m}\Omega$
Out conductor: $\leq 2.0 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Insulator withstanding: 1000V
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50Ω
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: $\leq 3.0 \text{ m}\Omega$
外导体: $\leq 2.0 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1000V
- 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
Female: beryllium, gold plated
- Body: Brass, gold plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

 	SCALE		SMA-KFD48A RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
	2.5:1			
NAME	DATE			
DRAWN				
CHECKED				
APPROVED				

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.