





This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

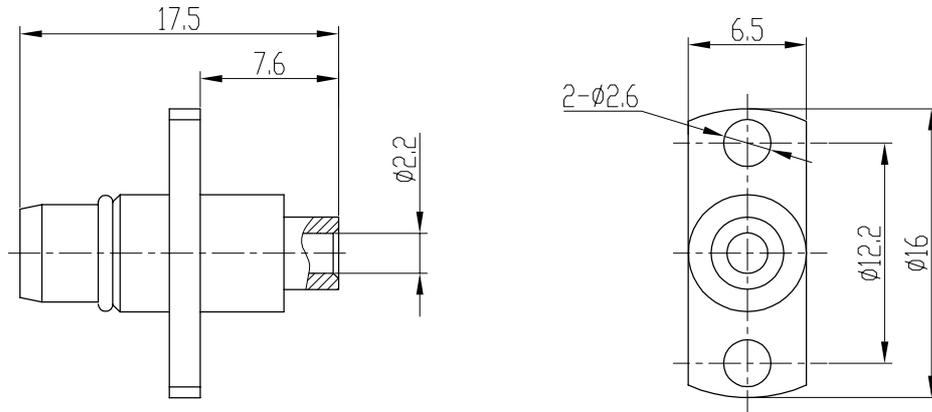

剥线尺寸
stripping dimension



产品型号 type	电缆型号 cable type
BMA-JFB2	SFT-50-2-1、RG405/U

Electrical Characteristics:

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~18Ghz
3. Contact resistance
Center conductor: ≤3.0 mΩ
Out conductor: ≤2.0 mΩ
4. Insulation resistance: ≥5000MΩ
5. Insulator withstanding: 750V
6. VSWR: ≤1.35
7. Durability: 1000cycles

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~18Ghz
3. 接触电阻:
中心导体: ≤3.0 mΩ
外导体: ≤2.0 mΩ
4. 绝缘电阻: ≥5000MΩ
5. 介质耐压: 750V
6. 电压驻波比: ≤1.35
7. 插拔次数: 1000次

Application: IEC 61169-33

执行标准: IEC 61169-33

Material&Finishing

1. Center contact :
Male:beryllium. gold plated
2. Body:brass, gold plated
3. Insulators:PTFE

材料和镀层

1. 中心接触件:
插针:铍青铜, 镀金
2. 壳体:黄铜, 镀金
3. 绝缘子:聚四氟乙烯

	SCALE	<p>BMA-JFB2 RF COAXIAL CONNECTOR</p>	<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±</p>
	2.5:1		
	NAME	DATE	
DRAWN			
CHECKED			
APPROVED			

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.