



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW Filter 576MHz SMD 3.8×3.8mm (BW=24MHz)

TST Parts No.:TA1355A

Customer Parts No.:_____

Customer signature required
Company:_____
Division:_____
Approved by :_____
Date:_____

Checked by: Kevin 

Approval by: Francis Chen 

Date: 2011/07/18

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 576 MHz

MODEL NO.: TA1355A

REV. NO.: 1

A. MAXIMUM RATING:

1. Input Power Level: 10 dB_m
2. DC voltage: 5 V
3. Operating Temperature: -30°C to 60°C
4. Storage Temperature: -40°C to +85°C




Electrostatic Sensitive Device (ESD)

B. CHARACTERISTICS:


Item	Unit	Min.	Typ.	Max.
Center frequency, Fc	MHz	-	576	-
Amplitude ripple (564 ~ 588 MHz)	dB	-	1.1	1.7
Insertion loss, IL (564 ~ 588 MHz)	dB	-	2.4	3.0
Group Delay, GD (564 ~ 588 MHz)	ns	-	52	200
Bandwidth @ -3 dB		24	37.9	-
Attenuation (reference from 0dB)				
0.3 ~ 501 MHz	dB	35	35	-
501 ~ 540 MHz	dB	10	27	-
609 ~ 666 MHz	dB	10	19	-
666 ~ 876 MHz	dB	38	43	-
876 ~ 1026 MHz	dB	33	38	-
Source impedance, Z _S	Ω	-	50	-
Load impedance, Z _L	Ω	-	50	-

Note1. No matching network required for operation at 50Ω


C. Transfer Function : Wideband

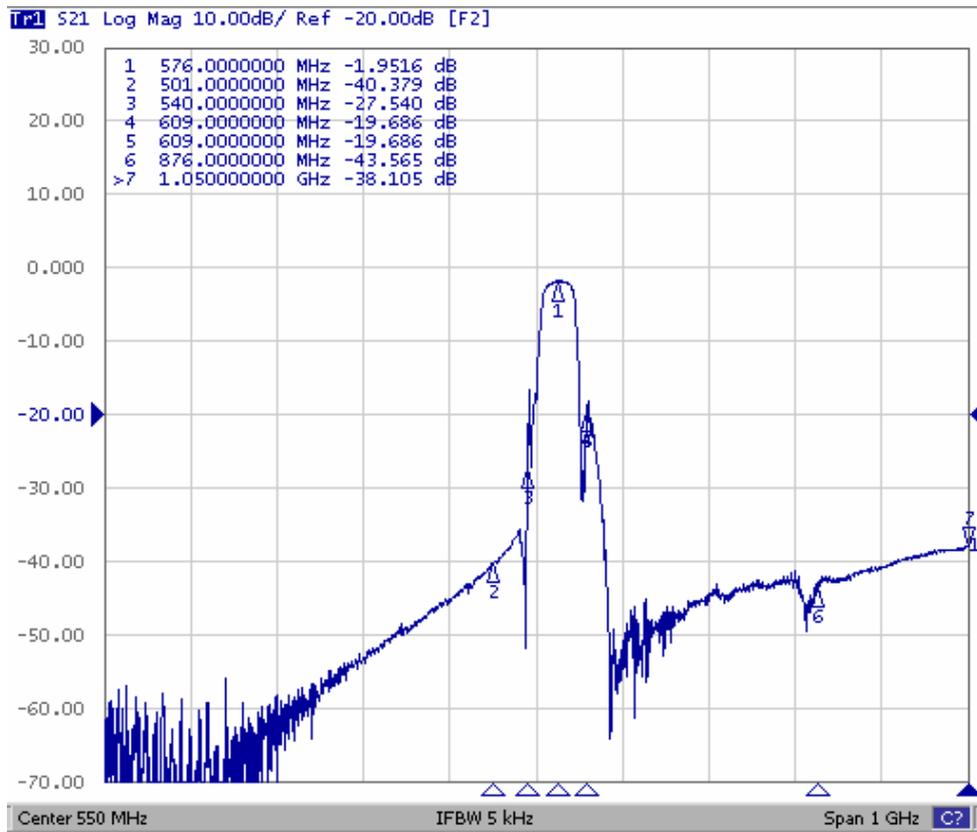


Passband

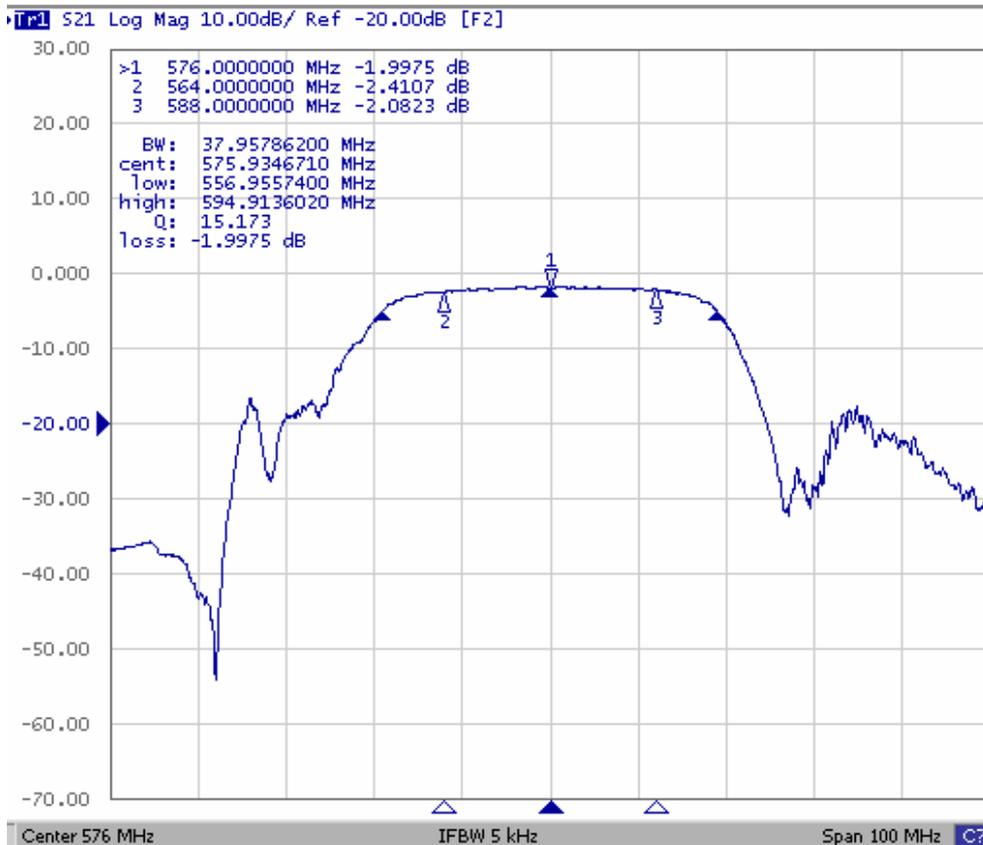

D. MEASUREMENT CIRCUIT:

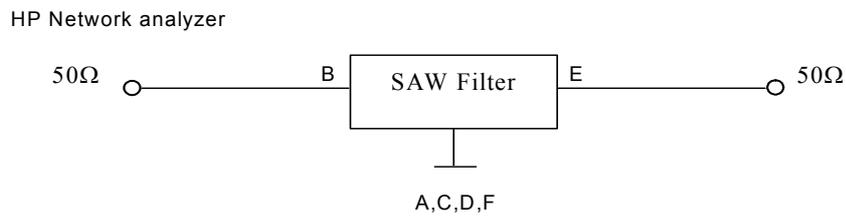

E. OUTLINE DRAWING:

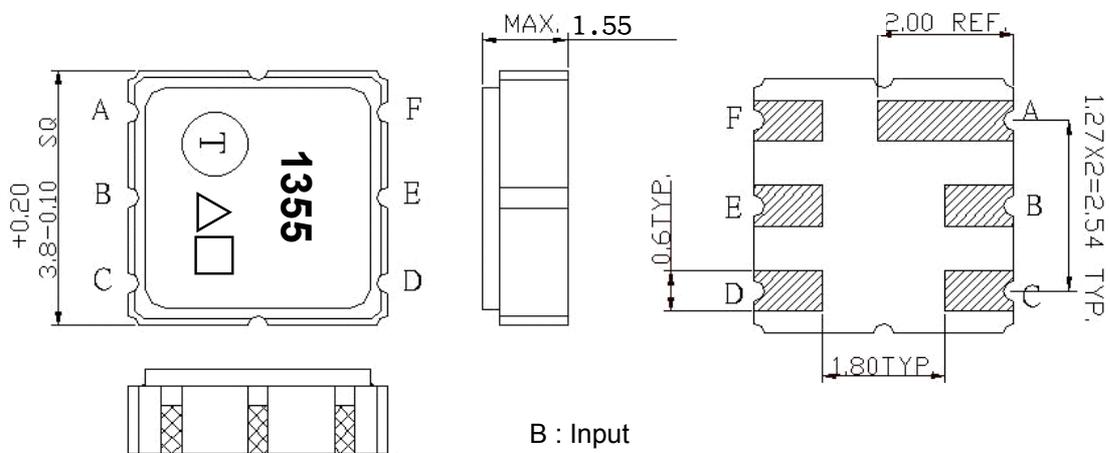


B : Input
 E : Output
 A,C,D,F Ground
 △ : Year Code
 □ : Date Code(Follow the table provided by planner each year.)
 Unit: mm

△ Product Year Code


Year	2011 2013 2015	2012 2014 2016
Product Code	A	a

F. PACKING:

1. REEL DIMENSION

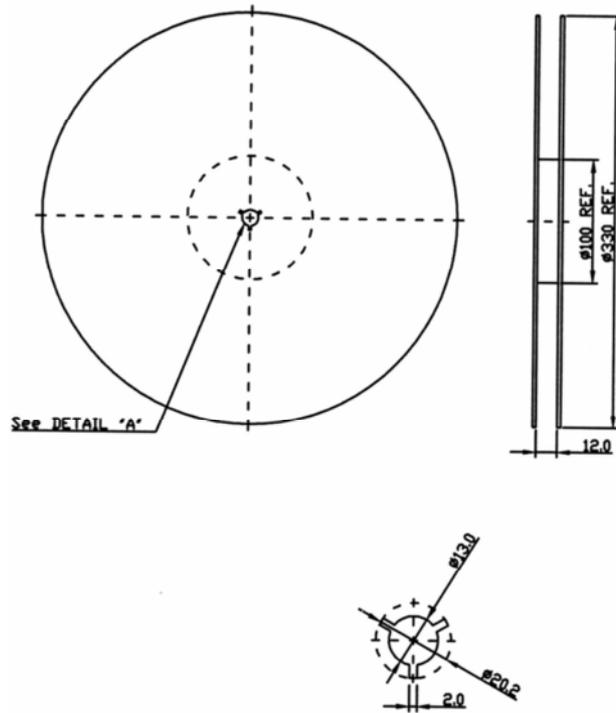

2. TAPE DIMENSION

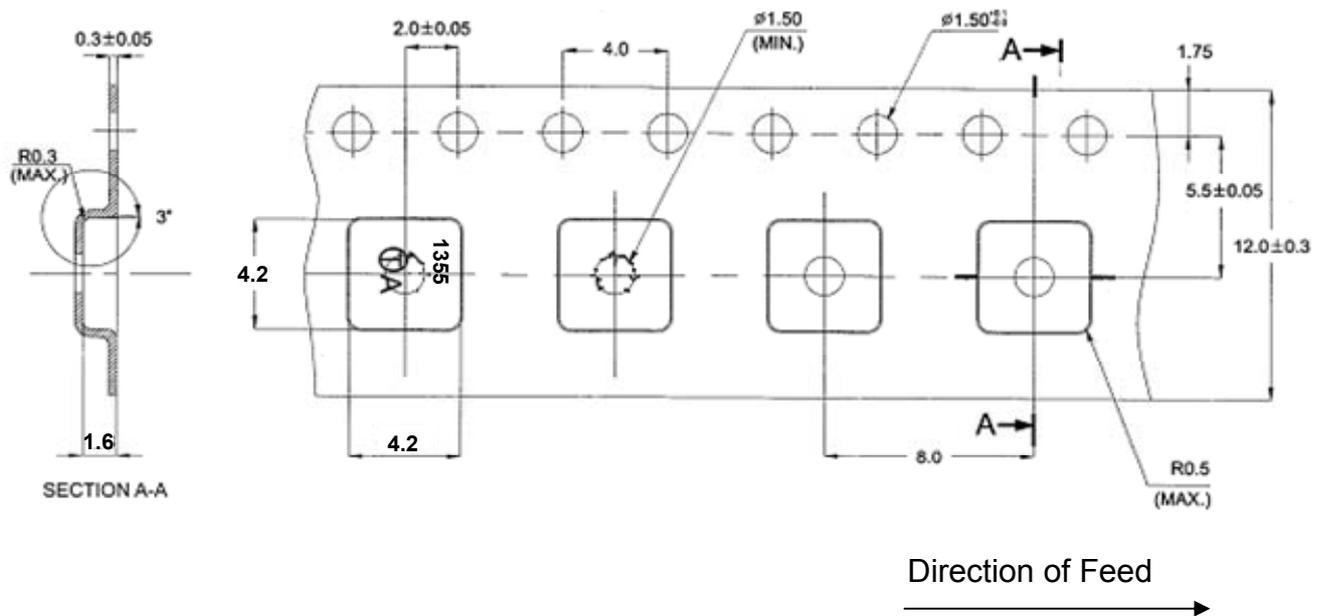

H. RECOMMENDED REFLOW PROFILE :

