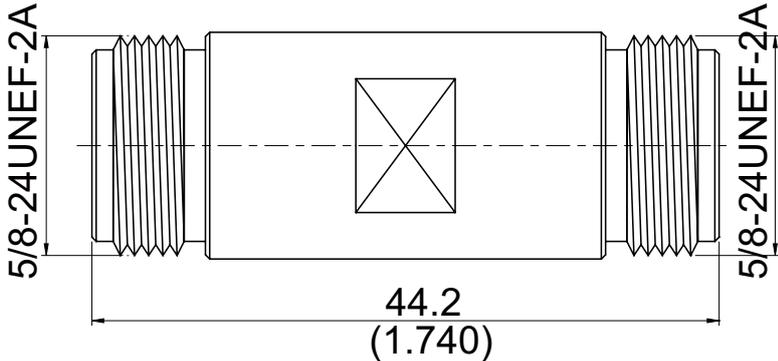


ADS-N8N8-18A	Stainless N Jack To N Jack Up To 18GHz	50Ω										
												
<p style="margin: 0;">Typical VSWR</p> <table border="1" style="margin: 0 auto; border-collapse: collapse;"> <thead> <tr> <th style="padding: 2px;">Part Number</th> <th style="padding: 2px;">1~2Ghz</th> <th style="padding: 2px;">3~6Ghz</th> <th style="padding: 2px;">7~17Ghz</th> <th style="padding: 2px;">18Ghz</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">ADS-N8N8-18A</td> <td style="padding: 2px;">1.03</td> <td style="padding: 2px;">1.05</td> <td style="padding: 2px;">1.1</td> <td style="padding: 2px;">1.14</td> </tr> </tbody> </table>			Part Number	1~2Ghz	3~6Ghz	7~17Ghz	18Ghz	ADS-N8N8-18A	1.03	1.05	1.1	1.14
Part Number	1~2Ghz	3~6Ghz	7~17Ghz	18Ghz								
ADS-N8N8-18A	1.03	1.05	1.1	1.14								
Parts	Material	Plating (Micro-inch)										
Holder	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20										
Insulator	P.P.											
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20										
Body	Stainless Steel	Passivated										
Weight:												

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.