
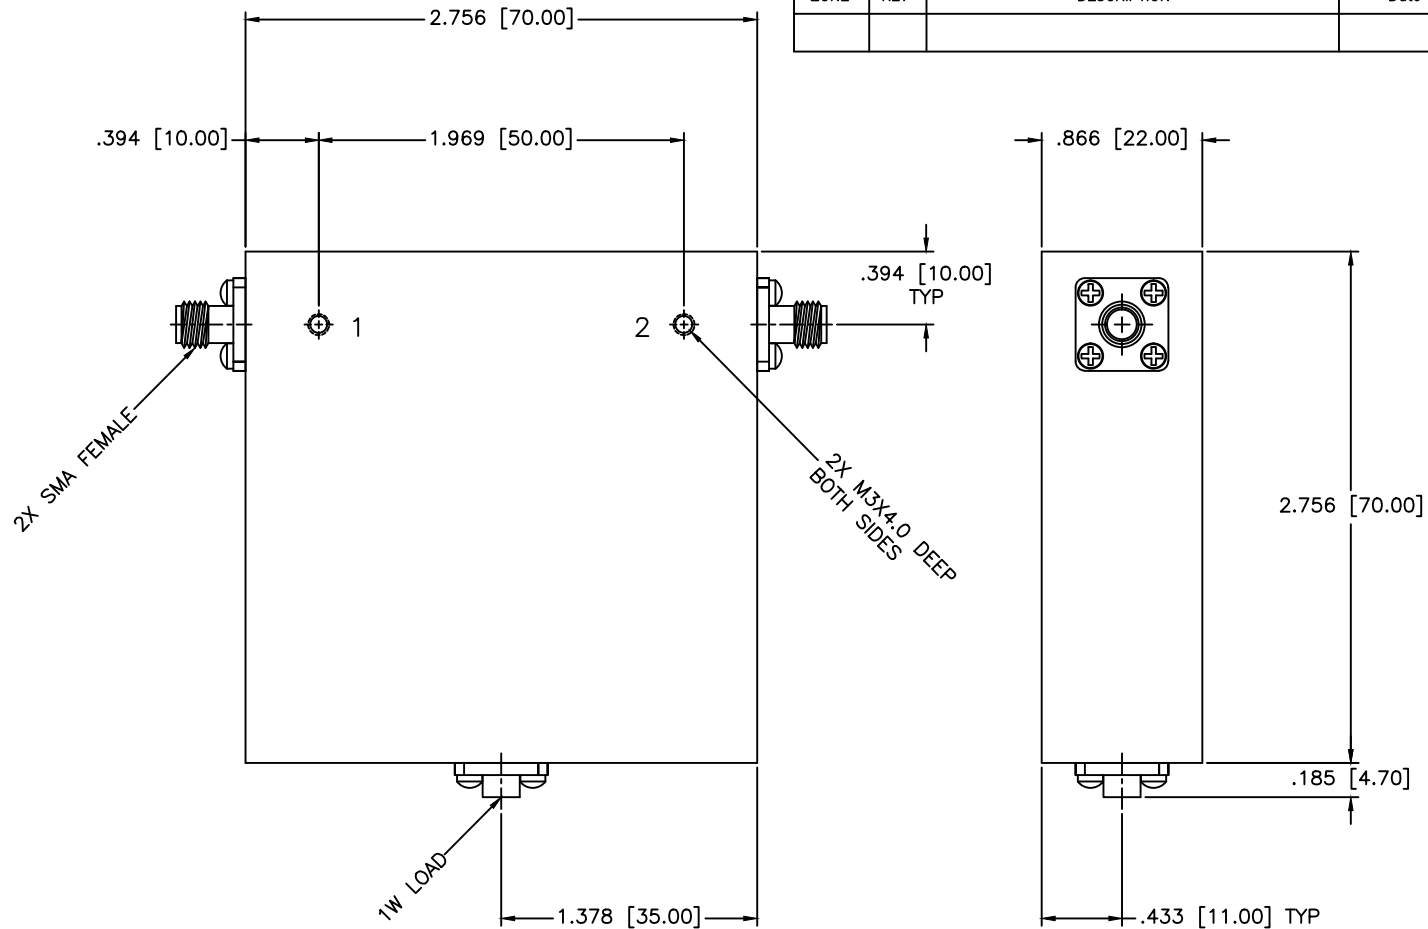


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS
Frequency Range: 1–2.6 GHz
Isolation: 15dB Min.
Insertion loss: 0.9dB Max.
VSWR: 1.50:1 Max.
Operating Temperature: 0°C to +50°C
Power Avg: 1 Watt
Power Peak: 100 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL ISOLATOR	
				PART NO. IS-4	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DWG NO.	
		THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5 SIZE: N/A REV: A DO NOT SCALE THE DRAWING	
DRAWN: Paiboon Luekhamhan		DATE: 08-22-2005			
APPROVED: T. Nguyen		DATE: 08-22-2005		82109	