


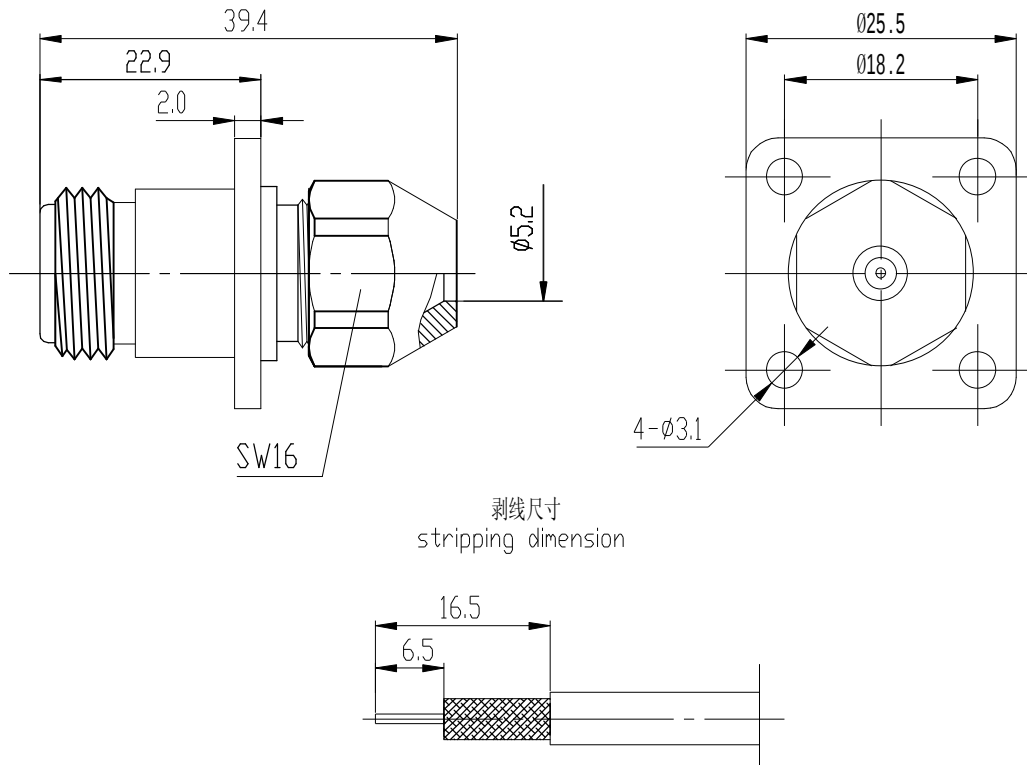

产品型号 type	电缆型号 cable type
N-KF5A	SFF-50-3-1、RG-141A/U、RG-58C/U

Electrical Characteristics:

- 1.Characteristic Impedance: 50Ω
- 2.Frequency range: DC~4Ghz
- 3.Contact resistance
Center conductor: $\leq 1.0 \text{ m}\Omega$
Out conductor: $\leq 0.2 \text{ m}\Omega$
- 4.Insulation resistance: $\geq 5000 \text{ M}\Omega$
- 5.Insulator withstanding: 1500V
- 6.VSWR: ≤ 1.5
- 7.Durability: 500cycles
Application: MIL-C-39012/1E

Material&Finishing

- 1.Center contact :
Female: phosphor bronze, gold plated
- 2.Bodies and other metal parts:
brass, nickel plated
- 3.Insulators: PTFE

主要性能指标:

- 1.特性阻抗: 50Ω
- 2.频率范围: DC~4Ghz
- 3.接触电阻:
中心导体: $\leq 1.0 \text{ m}\Omega$
外导体: $\leq 0.2 \text{ m}\Omega$
- 4.绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 5.介质耐压: 1500V
- 6.电压驻波比: ≤ 1.5
- 7.插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 1.中心接触件:
插孔: 锡磷青铜, 镀金
- 2.壳体和其它金属零件: 黄铜, 镀镍
- 3.绝缘子: 聚四氟乙烯

3. Insulators: PTFE				SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
				1.5:1		
		NAME		DATE		N-KF5A RF COAXIAL CONNECTOR 西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.
DRAWN						
CHECKED						
APPROVED						