


剥线尺寸
stripping dimension

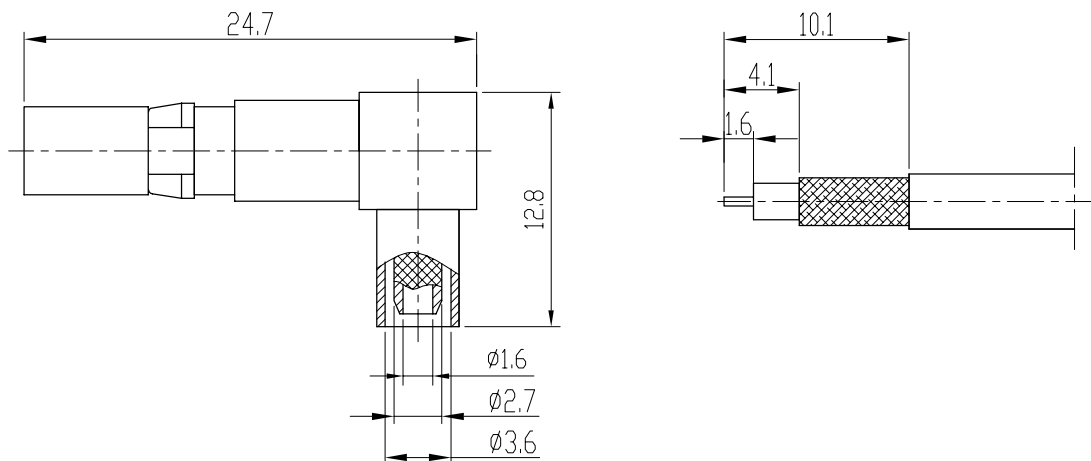

产品型号 type	配接电缆 cable type
DSB-JW3A	user supply (用户提供)

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~2.0Ghz
- Contact resistance
Center conductor: $\leq 6.0\ m\Omega$
Out conductor: $\leq 2.0\ m\Omega$
- Insulation resistance: $\geq 10000M\Omega$
- Insulator withstanding: 750V
- VSWR: ≤ 1.45
- Durability: 500cycles

Application: DIN 41626

Material&Finishing

- Center contact :
Male: copper, gold plated
- Body: brass, gold plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE


主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~2.0Ghz
- 接触电阻:
中心导体: $\leq 6.0\ m\Omega$
外导体: $\leq 2.0\ m\Omega$
- 绝缘电阻: $\geq 10000M\Omega$
- 介质耐压: 750V
- 电压驻波比: ≤ 1.45
- 插拔次数: 500次

执行标准: DIN 41626

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体: 黄铜, 镀金
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

	SCALE		DSB-JW3A RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table border="1"> <thead> <tr> <th>FRACTIONS</th> <th>DECIMALS</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>$.X\pm$</td> <td>$.15$</td> <td>$\pm 1^\circ$</td> </tr> <tr> <td>$.XX\pm$</td> <td>$.05$</td> <td></td> </tr> <tr> <td>$.XXX\pm$</td> <td></td> <td></td> </tr> </tbody> </table>	FRACTIONS	DECIMALS	ANGLES	$.X\pm$	$.15$	$\pm 1^\circ$	$.XX\pm$	$.05$		$.XXX\pm$		
	FRACTIONS	DECIMALS			ANGLES											
$.X\pm$	$.15$	$\pm 1^\circ$														
$.XX\pm$	$.05$															
$.XXX\pm$																
NAME	DATE															
DRAWN			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.													
CHECKED																
APPROVED																