

High Pass Filter

VHF-4400+

50Ω 5000 to 10100 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C

*Passband rating, derate linearly to 3W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Features

- Rugged uni-body construction, small size
- 5 sections
- Temperature stable
- Excellent power handling, 6W
- Low cost

Application

- Sub-harmonic rejection and DC blocking
- Transmitters/Receivers
- Lab use




CASE STYLE: FF704

Connectors	Model	Price	Qty.
SMA	VHF-4400+	\$24.95 ea.	(1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

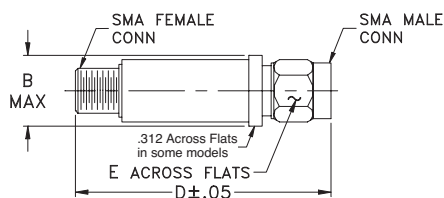


Outline Dimensions (inch mm)

B	D	E	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10


High Pass Filter Electrical Specifications (T_{AMB} = 25°C)

STOPBAND (MHz)		fco, MHz	PASSBAND (MHz)		VSWR		NO. OF SECTIONS
Typ. DC-F1	Min. DC-F2	Nom. Typ. F3	Max. F4-F5	Max.	Typ. Stopband	Frequency (MHz)	
DC-3600	DC-3500	4400	5000-9900	5000-10100	20:1	4600-10100	5

Typical Frequency Response

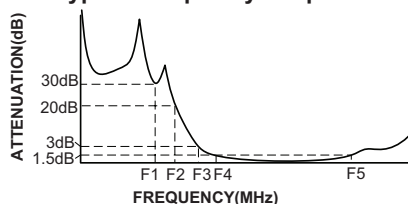


Electrical schematic

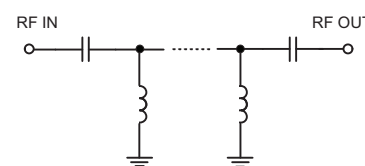

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	60.59	868.59
500	41.41	868.59
2500	45.12	86.86
3500	32.77	51.10
3600	37.78	37.77
3850	23.77	30.49
4050	13.48	16.26
4200	7.79	7.80
4400	2.95	2.72
4600	1.32	1.43
5000	0.93	1.50
9900	0.63	1.42
10100	0.72	1.56
10500	0.94	1.84
11500	1.97	2.86
13000	3.42	4.89
16000	2.77	2.83

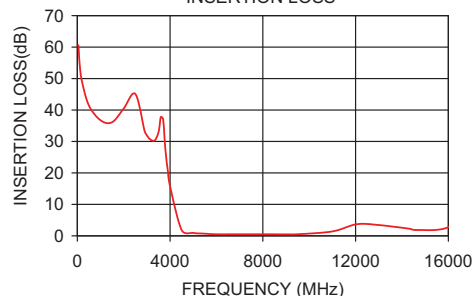VHF-4400+
INSERTION LOSSVHF-4400+
VSWR