


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

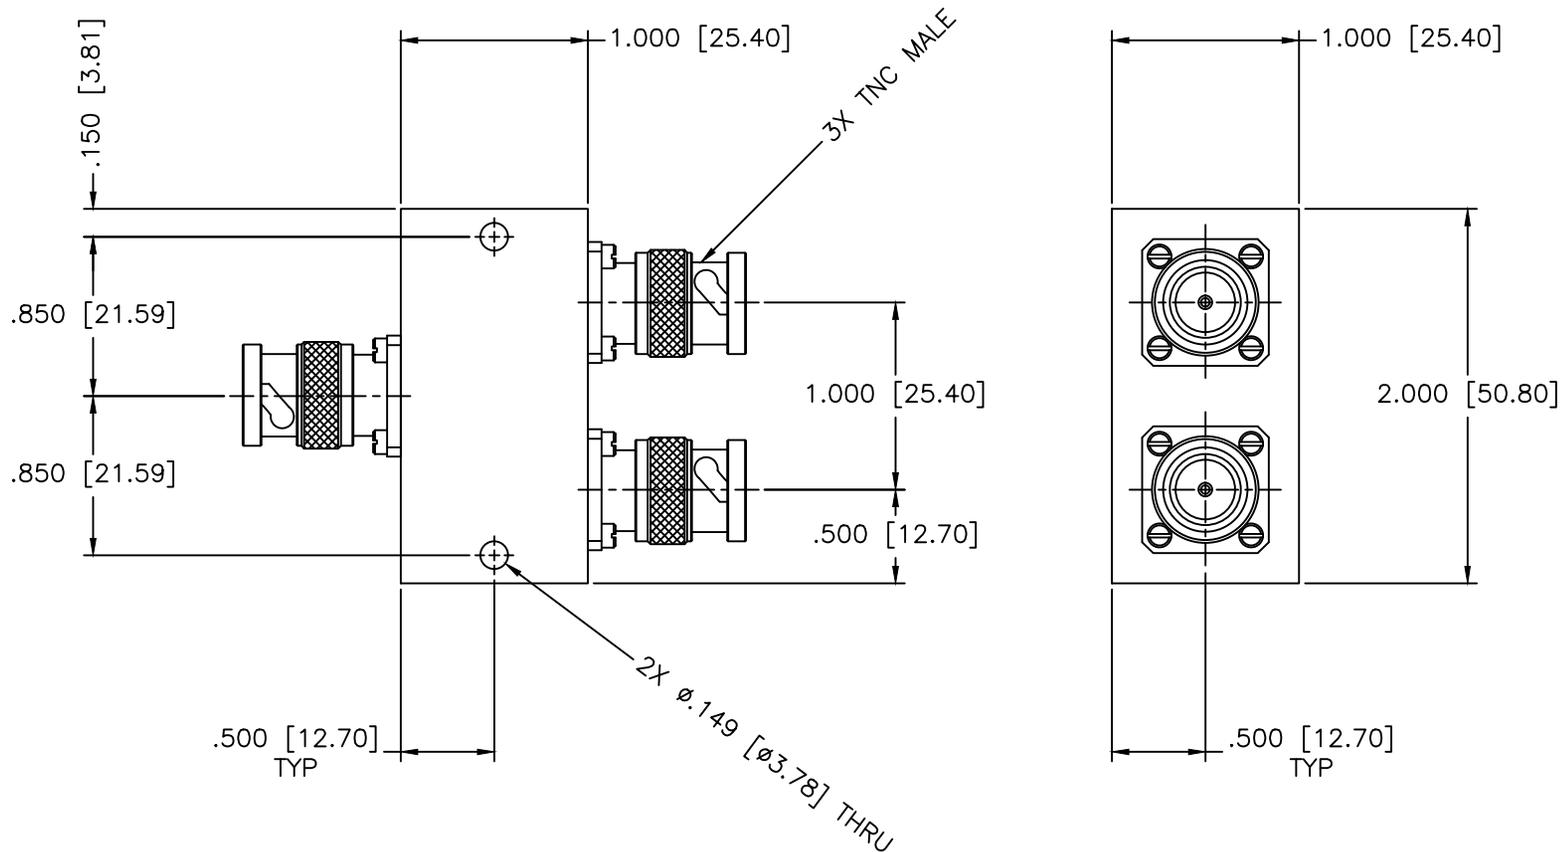

**SPECIFICATIONS**

Frequency Range: 9–11 GHz  
 Insertion Loss: 0.7dB Max.  
 Isolation: 12dB Min.  
 VSWR In/Out: 1.55:1/1.50:1 Max.  
 Phase Balance: ±6 Deg. Max.  
 Amplitude Balance: ±0.3dB Max.  
 Power: 30W (Load vswr@1.2)  
 Operating Temperature: -55°C to +95°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: <b>2-WAY POWER DIVIDERS</b>	
		<small>           PROPRIETARY NOTICE:            THE INFORMATION IN THIS DRAWING IS PROPRIETARY            AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN            PERMISSION FROM MICROWAVE COMMUNICATIONS            LABORATORIES INC. (MCLI)         </small>	PART NO. <b>PS2-184/TNM</b>	
DRAWN:	DATE:	<small>           THIRD ANGLE PROJECTION         </small>	CAGE CODE:	SIZE:
Paiboon Luekhamhan	10-28-2008		OD2L5	A
APPROVED:	DATE:			N/A
T. Nguyen	10-28-2008			DWG NO.
			DO NOT SCALE THE DRAWING	
			83974	