



ISSUE 10; July 2014 - RoHS 2011/65/EU

Description

- 5V supply AC MOS/TTL compatible output crystal oscillator in a 14-pin DIL metal package, hermetically sealed
- See IQXO-331 for product with Tri-state Operation

Frequency Parameters

- Frequency 70.0MHz to 150.0MHz
- Frequency Stability $\pm 25.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing $\pm 5\text{ppm}$ max per year

Electrical Parameters

- Supply Voltage 5.0V $\pm 0.25\text{V}$
- Solderability: MIL-STD-202E, Method 208C

Operating Temperature Ranges

- 0 to 70°C
- 40 to 85°C

Output Details

- Output Compatibility AC MOS/TTL

Drive Capability	
0.0MHz to 1,000,000.0MHz	10TTL
70.0MHz to 110.0MHz	50pF max
110.0MHz to 150.0MHz	15pF max

Environmental Parameters

- Shock: 981m/s², 6ms, 3 times in each of 3 mutually perpendicular planes
- Vibration: 10Hz-55Hz, 0.76mm displacement, 1min in each of 3 mutually perpendicular planes, duration 2hrs each plane
- Rapid Change of Temperature over Operating Temperature Range:
10 cycles
- Hermetic Seal: Not to exceed 1 x 10⁻⁸ mBar litres of Helium leakage
- Terminal Strength: 0.91kg max force perpendicular to top and bottom
- Storage Temperature Range: -55 to 125°C

Ordering Information


- Frequency*
- Model*
- Output
- Frequency Stability*
- Operating Temperature Range*
- Supply Voltage
- (*minimum required)
- Example
- 100.0MHz IQXO-336
- AC MOS $\pm 50\text{ppm}$ 0 to 70C 5.0V

Compliance

- RoHS Status Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable




Outline (mm)




Pin Connections

- 1. N/C
- 7. GND
- 8. Output
- 14. +Vs



Test Circuit

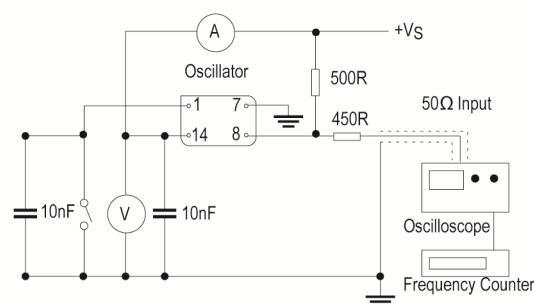

Note: Pin 1 = No connection on non tri-state models

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18
USA: +1 408.273.4530


Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com



Packaging Details

- Pack Style: Bulk Loose in bulk pack
Pack Size: 25

Wave Form

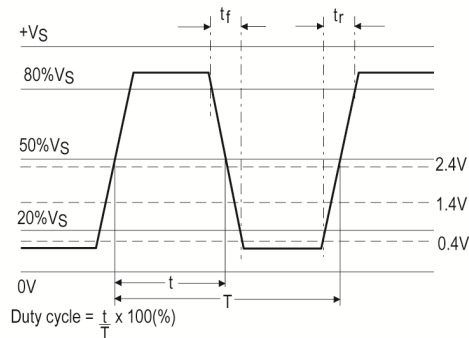

Electrical Specification - maximum limiting values 5.0V $\pm$ 0.25V

Frequency Min	Frequency Max	Temperature Range	Stability (min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
70.0MHz	89.999999MHz	0 to 70	$\pm$ 25.0	45	3	40/60
		-40 to 85	$\pm$ 25.0	45	3	40/60
90.0MHz	114.999999MHz	0 to 70	$\pm$ 25.0	60	3	40/60
		-40 to 85	$\pm$ 25.0	60	3	40/60
115.0MHz	150.0MHz	0 to 70	$\pm$ 25.0	65	3	40/60
		-40 to 85	$\pm$ 25.0	65	3	40/60

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com