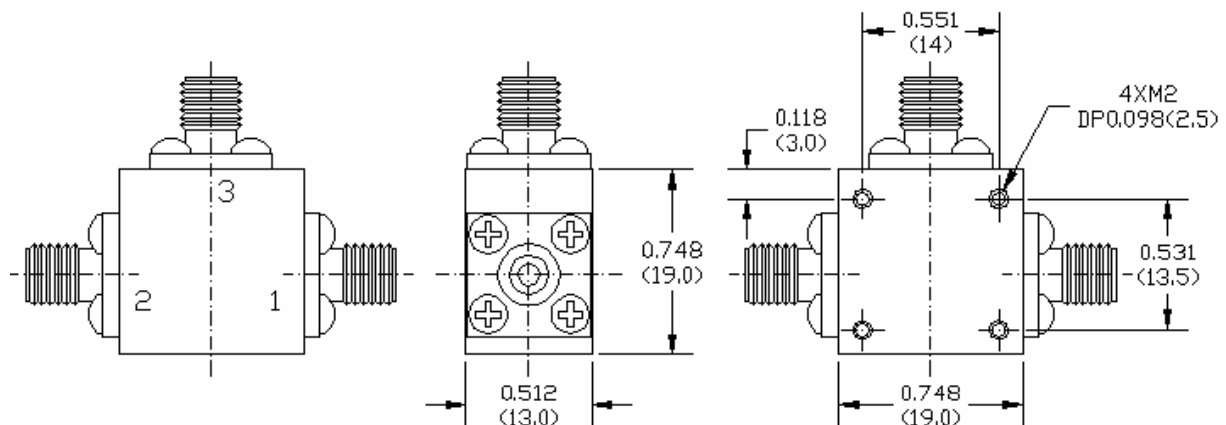


Key Features:

- Frequency range: 4.0~8.0GHz, bandwidth up to full band
- SMA connectors
- Small size, low cost
- Power handling +5 Watts
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation , dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2658-0600-67	4.0~8.0	0.5 Max	≥ 19	≤ 1.35	5	-20 ~ +65

Mechanical Structure:**Ordering Information:**

Note: All units are in inches.

F2658-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 ↓
 Frequency XX.XX GHz,