
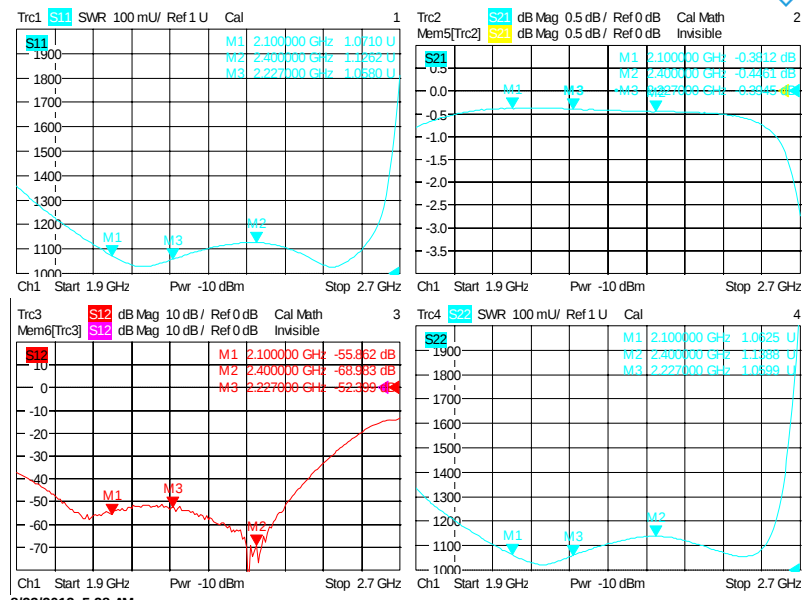
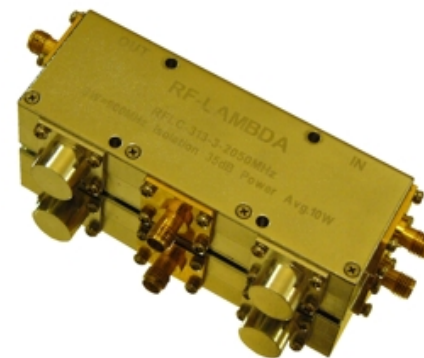


TRIPLE JUNCTIONS CIRCULATOR--- RFLC313G21G24

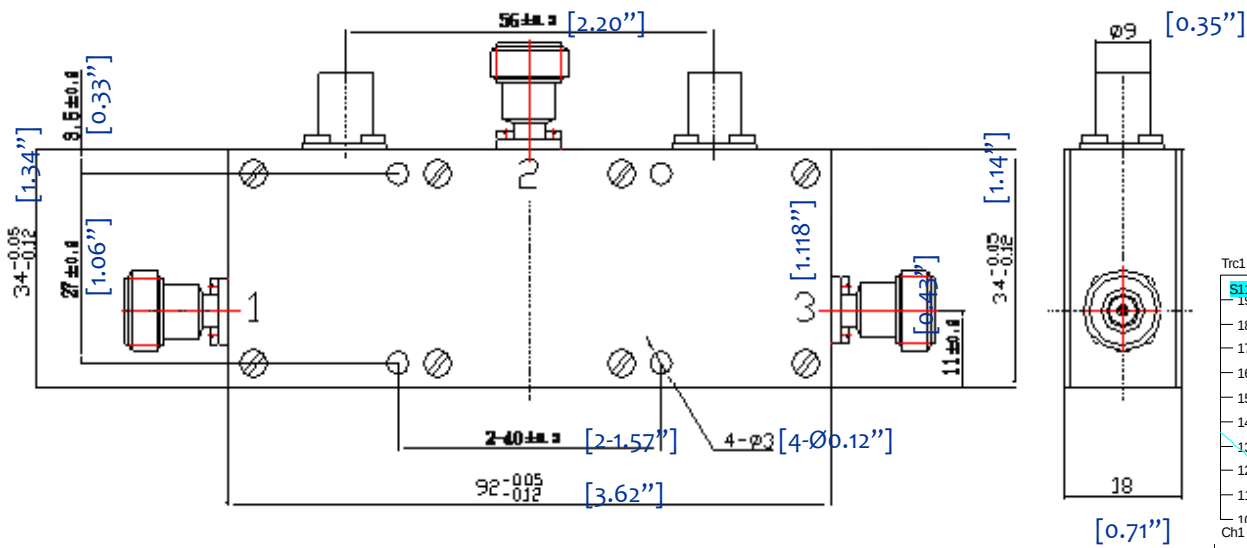

1.0	Mechanical Specifications	
1.1	Coaxial Connector	SMA / N type
1.2	External Body Finish	Conductive no paint
1.3	Rotation	Clockwise / Counter-clockwise

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-40°C~+100°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35°C, 95%RH at 40 deg C
2.6	Shock	20G for 11msec

PN	Frequency Range (GHz)	Bandwidth (MHz)	Insertion loss (dB) max		Isolation (dB) min				VSWR (max)	Power (W) CW
			1->2	2->3	2->1	3->2	3->1	1->3		
RFLC313G21G24	2.1~2.4	300	0.8	0.8	50	50	50	25	1.2	10/1