

SMA F/F ADAPTERS NO EPOXY HOLE

SM4932

SPECIFICATIONS

ELECTRICAL

50 OHMS
 VSWR 1.20:1 MAX @ 18 GHZ
 FREQUENCY: 0-18 GHZ

MECHANICAL

500 CYCLES MIN
 7-10 LBS COUPLING NUT MATING TORQUE


ENVIRONMENTAL

-65 DEG C TO +85 DEG C

MATERIALS BODY PASSIVATED STAINLESS STEEL


CENTER CONTACTS BECU
 INSULATOR: PTFE
 CONTACT PLATING: Au PER MIL-G-45204
 INTERFACE: MIL-STD-348

ROHS COMPLIANT

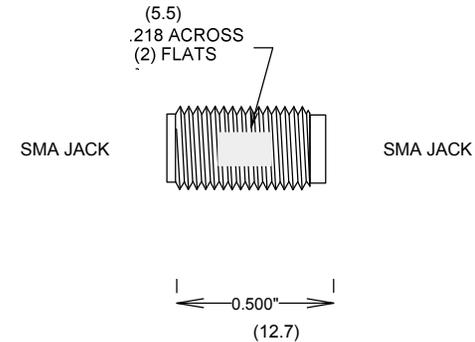

NO EPOXY HOLE FOR IMPROVED EMI PERFORMANCE

MEASUREMENTS BELOW ARE TYPICAL

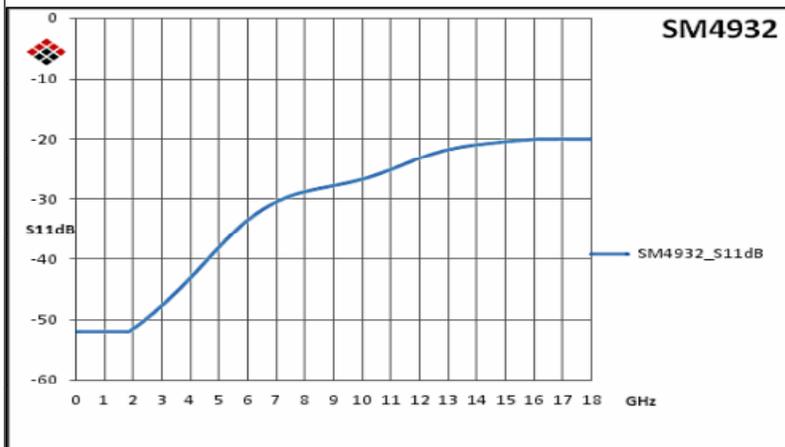

ALL DIMENSIONS IN inches(MM) Typical

| | | | |
|---|--------------|---------------|----------|
| FAIRVIEW MICROWAVE INC. | | | |
| ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | | | |
| TITLE | | | |
| SMA F/F ADAPTERS NO EPOXY HOLE | | | |
| SIZE | CAGE CODE | DWG NO | REV |
| A | 3FKR5 | SM4932 | D |
| SCALE | | SHEET | |