


剥线尺寸
stripping dimension

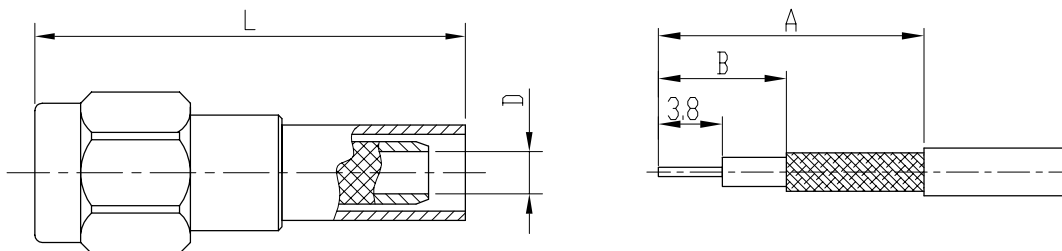

产品型号 type	电缆型号 type cable	L	D	A	B
SMA-J3F	SFF-50-1.5-1、RG316/U	25.5	Ø1.6	11.8	5.3
SMA-J4	SFF-50-2-1	23.7	Ø2.3	14.8	7.3
SMA-J4-1	SFF-50-2-2				
SMA-J5	SFF-50-3-1、RG141A/U	28.7	Ø3.1	16.3	5.8
SMA-J5A	SFF-50-3-2、RG142B/U	28.7			
SMA-J223	RG223/U	28.5			

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: ≤4.0 mΩ
Out conductor: ≤2.5 mΩ
- Insulation resistance: ≥1000MΩ
- Insulator withstanding: 750V
- VSWR: ≤1.35
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: ≤4.0 mΩ
外导体: ≤2.5 mΩ
- 绝缘电阻: ≥1000MΩ
- 介质耐压: 750V
- 电压驻波比: ≤1.35
- 插拔次数: 500次

Application:MIL-C-39012/55D

执行标准:MIL-C-39012/55D

Material&Finishing

- Center contact :
Male:brass, gold plated
- Body:brass, gold plated
- Crimp ferrule:copper, nickel plated
- Insulators:PTFE

材料和镀层

- 中心接触件:
插针:黄铜, 镀金
- 壳体:黄铜, 镀金
- 线夹: 黄铜, 镀镍
- 绝缘子:聚四氟乙烯

		SCALE	SMA-J3F RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		2.5:1		
DRAWN	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
CHECKED				
APPROVED				