


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

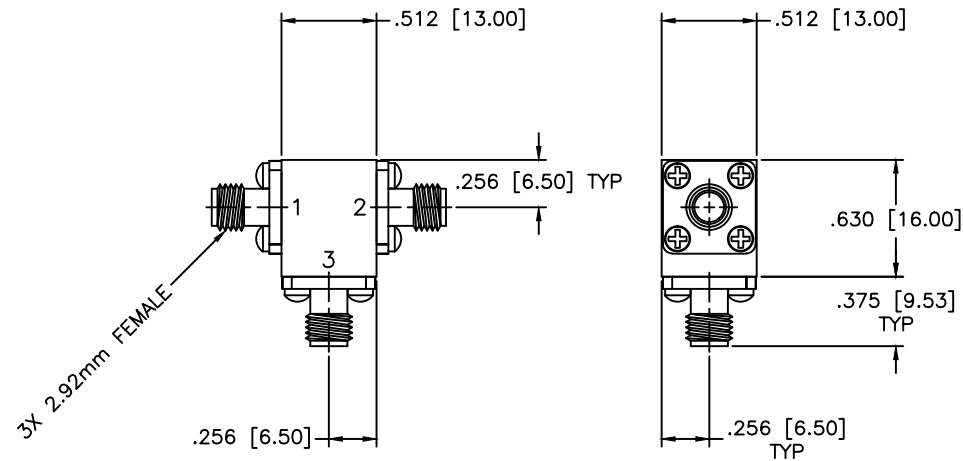

SPECIFICATIONS

Frequency Range: 27–31 GHz
 Isolation: 20dB Min.
 Insertion loss: 1.1dB Max.
 VSWR: 1.35:1 Max.
 Circulator Power: 25W Avg.
 Operating Temperature: –10°C to +60°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR	
				PART NO.	
DRAWN: Paiboon Luekhamhan		DATE: 03-01-2010		CS-124	
APPROVED: T. Nguyen		DATE: 03-01-2010		CAGE CODE:	
				SIZE: A	
				REV: N/A	
				DWG NO.	
				84728	
				DO NOT SCALE THE DRAWING	