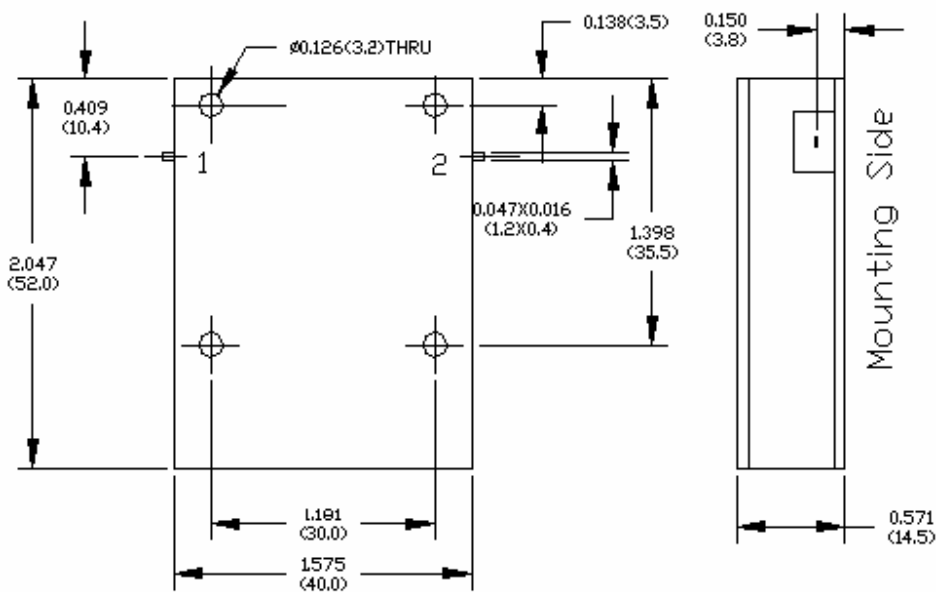


Key Features:

- Frequency range: 400~900MHz, up to 22% bandwidth
- Drop-in configuration
- Small size, low cost
- Power handling +75 Watts forward, 75Watt reverse termination,
- Operating temperature -30~+60°C
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F1545-0520-20	470-570	0.5 Max	≥ 20	≤ 1.2	≥ 75	≥ 75	-30 ~ +60
F1545-0630-21	570~700	0.5 Max	≥ 20	≤ 1.2	≥ 75	≥ 75	-30 ~ +60
F1545-0780-21	700-860	0.5 Max	≥ 20	≤ 1.2	≥ 75	≥ 75	-30 ~ +60

Mechanical Structure:

Note: All units in inches (mm).

Ordering Information:

F1045-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 ↓
 Frequency XXXX MHz