

"High Frequency Ceramic Solutions"

4.02 GHz Band Pass Filter (UWB High Rejection BPF)

P/N 4020BP39A0160

Detail Specification: 10/22/12

Page 1 of 2

General Specifications

Part Number	4020BP39A0160
Frequency (MHz)	3940 ~ 4100
Insertion Loss	4 dB max.
Return Loss	20.8 dB max.
Attenuation (dB)	34 dB @ < 2540 MHz
	14 dB @ 3480 MHz
	14 dB @ 3480 MHz
	34 dB @ 5150 - 5350 MHz



Impedance	50 Ω
Input Power	500 mW max.
Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, Humidity 45~75%RH, 18 mos. Max
Reel Quantity	3,000
MSL	1

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 4020BP39A0160S
		T & R	Suffix = E	eg. 4020BP39A0160E
	Termination style	100% Tin	Suffix = None	eg. 4020BP39A0160 (E or S)
	Evaluation Board	4020BP39A0160-EBSMA		


Mechanical Dimensions

	In	mm
L	0.098 $\pm$ 0.008	2.50 $\pm$ 0.20
W	0.079 $\pm$ 0.008	2.00 $\pm$ 0.20
T	0.043 $\pm$ 0.004	1.10 $\pm$ 0.10
a	0.012 $\pm$ 0.008	0.30 $\pm$ 0.20
b	0.024 $\pm$ 0.008	0.60 $\pm$ 0.20
c	0.012 $\pm$ 0.008	0.30 $\pm$ 0.20



Terminal Configuration

No.	Function
1	GND
2	OUT
3	GND
4	IN




Mounting Considerations

Mount these devices with brown mark facing up.

*Line width should be designed to provide 50 Ω impedance matching characteristics.

Units: mm

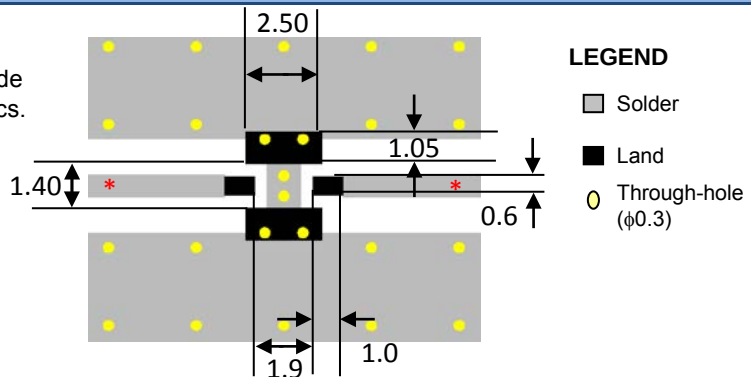

"High Frequency Ceramic Solutions"


4.02 GHz Band Pass Filter (UWB High Rejection BPF)

P/N 4020BP39A0160

Detail Specification: 10/22/12

Page 2 of 2

Typical Electrical Performance (T=25°C)

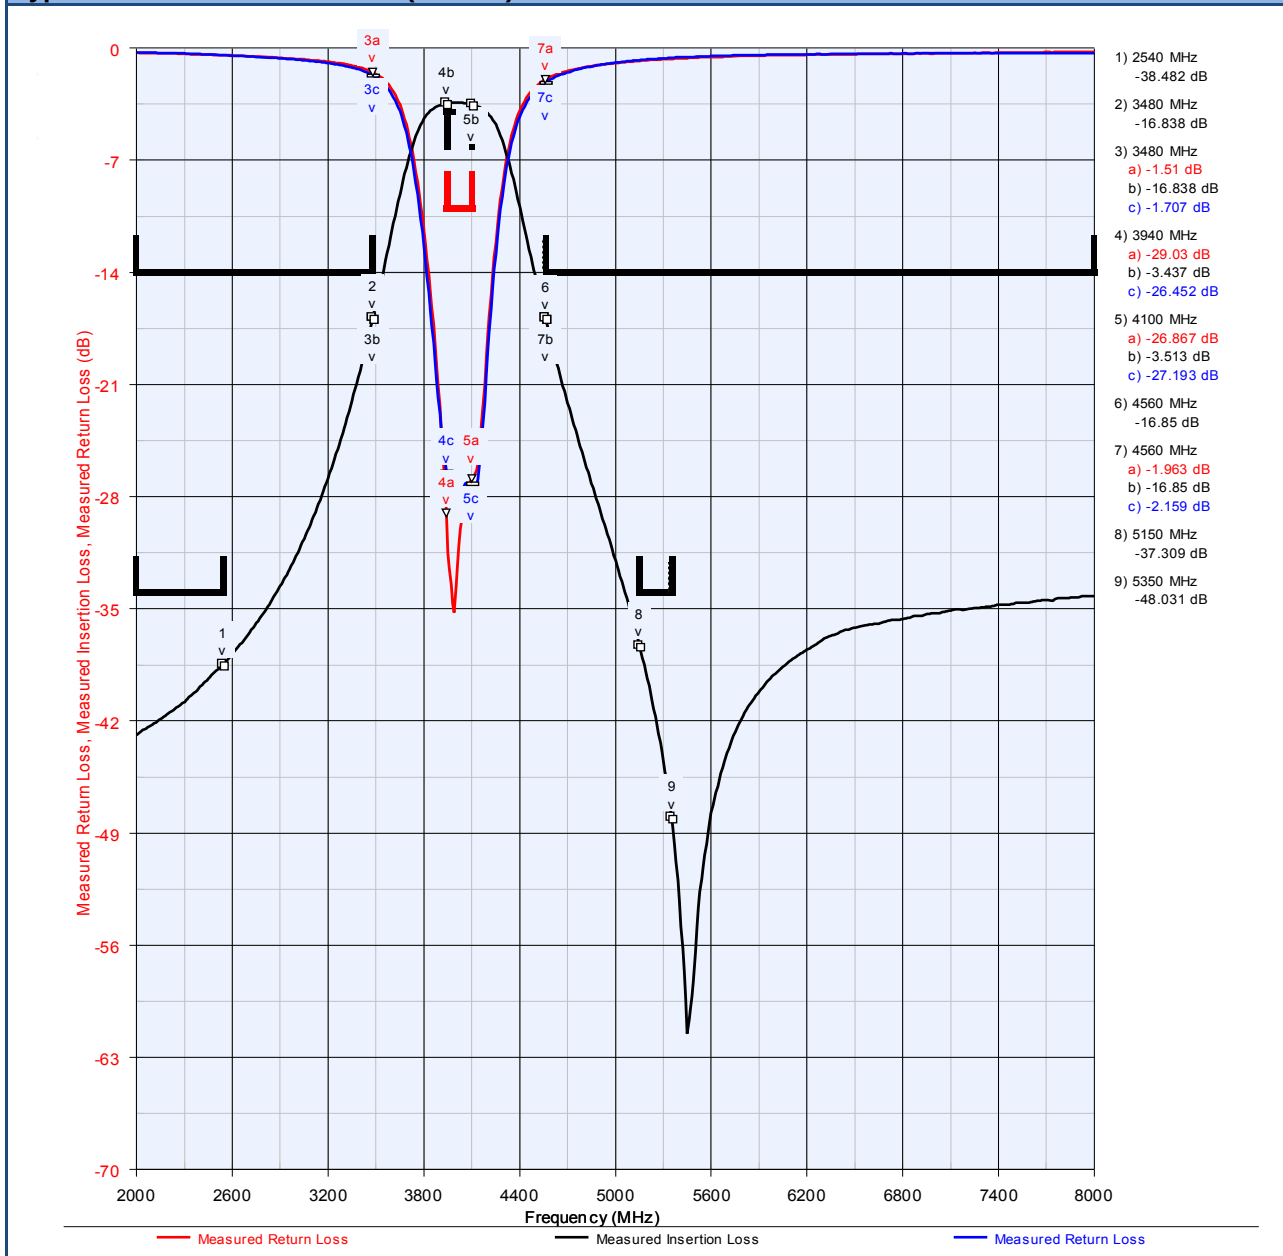

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved