


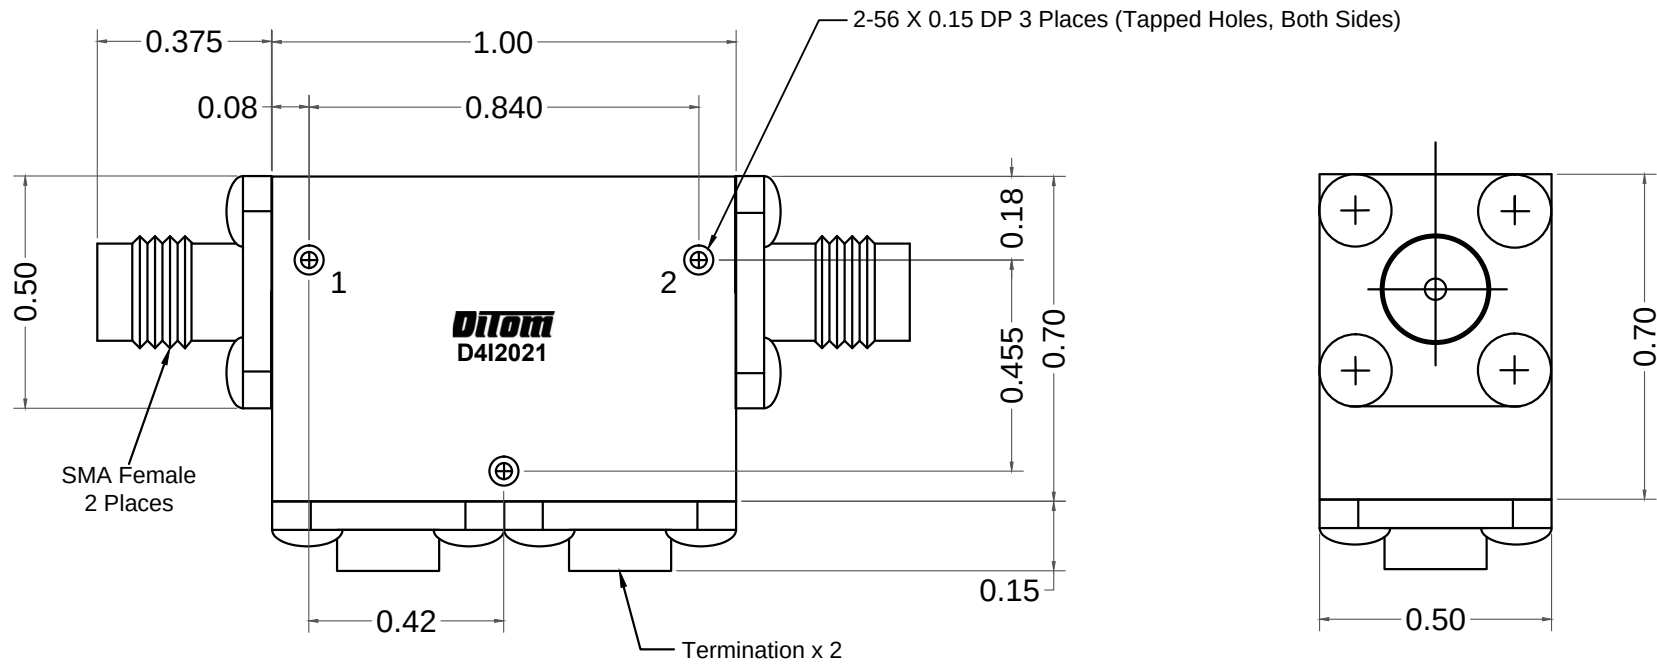

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	20.00 - 21.50
ISOLATION (dB):	44 MIN
INSERTION LOSS (dB):	0.80 MAX
VSWR:	1.20 MAX
POWER: AVG (PORT 1 TO 2):	10W
REFLECTIVE POWER (TERM):	2W
PEAK:	50W

MECHANICAL SPECIFICATIONS

CONNECTORS:	SMA-FEMALE, STAINLESS STEEL, PASSIVATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	0° to +50°C
WEIGHT (APPROX):	1.30 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED	 Fresno, California, USA	
TOLERANCE XX±0.03 XXX±0.010	TITLE 20.00 - 21.50 GHz Isolator	
SCALE 5:1	MODEL NO D4I2021	REV