


剥线尺寸
stripping dimension

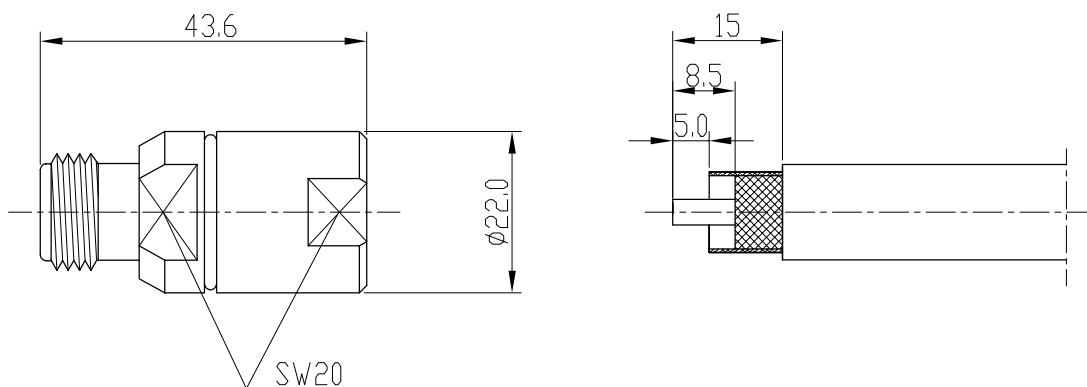

产品型号 type	电缆型号 cable type
N-K632	10D-FB
N-K636	12D-FB

Electrical Characteristics:

- Characteristic Impedance: 50Ω
- Frequency range: DC~3Ghz
- Contact resistance
Center conductor: $\leq 1.0\text{ m}\Omega$
Out conductor: $\leq 0.2\text{ m}\Omega$
- Insulation resistance: $\geq 5000\text{ M}\Omega$
- Insulator withstanding: 1500V
- VSWR: ≤ 1.3
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50Ω
- 频率范围: DC~3Ghz
- 接触电阻:
中心导体: $\leq 1.0\text{ m}\Omega$
外导体: $\leq 0.2\text{ m}\Omega$
- 绝缘电阻: $\geq 5000\text{ M}\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.3
- 插拔次数: 500次

Application: MIL-C-39012/1E


执行标准: MIL-C-39012/1E

Material & Finishing

- Center contact :
Female: phosphor bronze, gold plated
- Bodies and other metal parts:
brass, nickel plated
- Insulators: PTFE
- Gasket: silicone rubber

材料和镀层

- 中心接触件:
插孔: 锡磷青铜, 镀金
- 壳体和其它金属零件:
黄铜, 镀镍
- 绝缘子: 聚四氟乙烯
- 密封圈: 硅橡胶

	SCALE		N-K632 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table border="1"> <thead> <tr> <th>FRACTIONS</th> <th>DECIMALS</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>.X±</td> <td>.15</td> <td>±1°</td> </tr> <tr> <td>.XX±</td> <td>.05</td> <td></td> </tr> <tr> <td>.XXX±</td> <td></td> <td></td> </tr> </tbody> </table>	FRACTIONS	DECIMALS	ANGLES	.X±	.15	±1°	.XX±	.05		.XXX±		
	FRACTIONS	DECIMALS			ANGLES											
.X±	.15	±1°														
.XX±	.05															
.XXX±																
	1:1															
NAME	DATE															
DRAWN																
CHECKED																
APPROVED																

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.