



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Tao-Yuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet for Product Specification

Issued Date:

Product Name: 480MHz IF SAW Filter (BW=15 MHz)

TST Parts No.: TB0714A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Andy Yu *Andy*

Approval by: _____ Francis Chen *(Signature)*

Date: _____ 03/10/2009



TAI-SAW TECHNOLOGY CO., LTD.

No.3, Industrial 2nd Rd., Ping-Chen Industrial District, Taoyuan, Taiwan, R.O.C.

TEL: 886-3-4690038

FAX: 886-3-4697532

E-mail: tstsales3@mail.taisaw.com Web: www.taisaw.com

SAW Filter 480MHz (SMD 5.0×5.0 mm)

MODEL NO.: TB0714A

Rev. NO. 1.0

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. Operating Temperature: -20 °C ~ +70°C
3. Storage Temperature: -40 °C ~ +85 °C

RoHS Compliant
Lead free
Lead-free soldering


B. Characteristics :

Ambient Temperature: 25 °


Characteristics	Value			Note
	Min.	Typ.	Max.	
Center frequency F_c MHz	-	480	-	-
Minimum Insertion loss I.L. dB	-	14.7	17.0	-
3 dB Bandwidth MHz	15.0	15.2	-	-
40 dB Bandwidth	-	25.6	27.0	
Amplitude Ripple ($F_c \pm 5.0\text{MHz}$) dB	-	0.5	1.0	-
Group-delay Ripple ($F_c \pm 6.0\text{MHz}$) nsec	-	35	50	-
Temp Coefficient ppm/°C	-	-18	-	-
Attenuation (Reference level from Minimum insertion loss)				
498~502MHz dB	43	49	-	-

C. FREQUENCY CHARACTERISTICS:


(1) S21 Response: (span 150MHz)

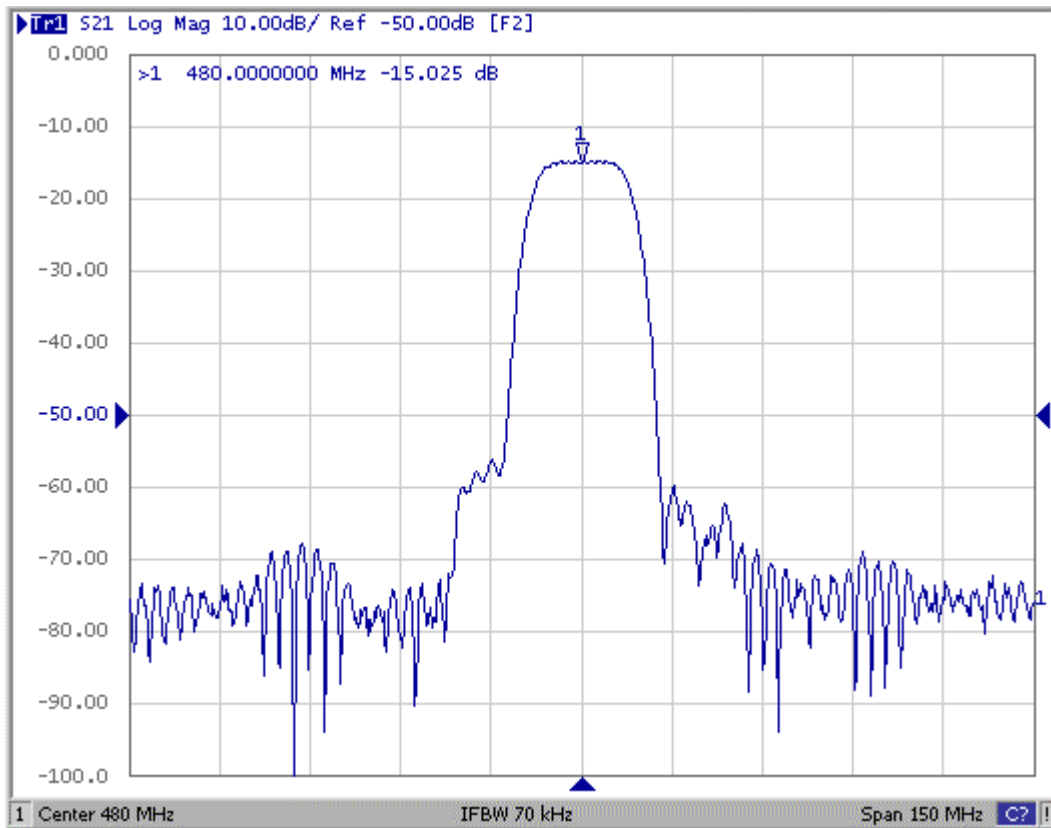


(2) Passband of Response: (span: 20MHz)

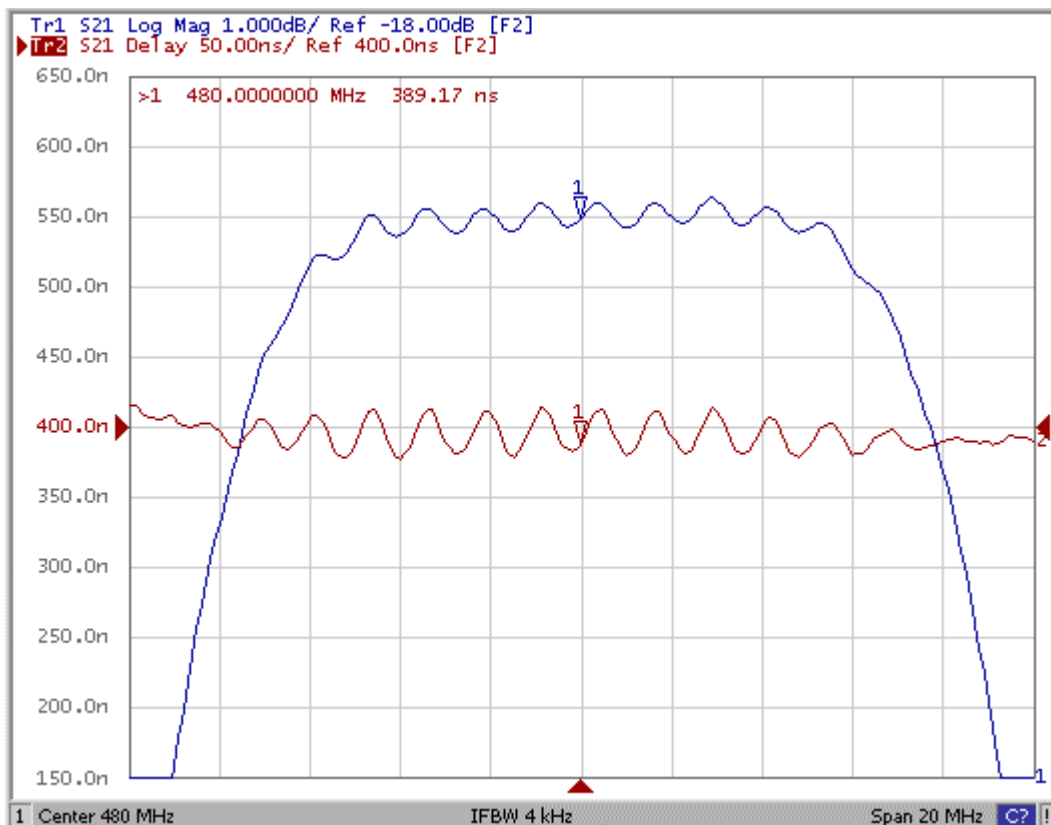


(3) S11 Smith Chart: (span 150MHz)

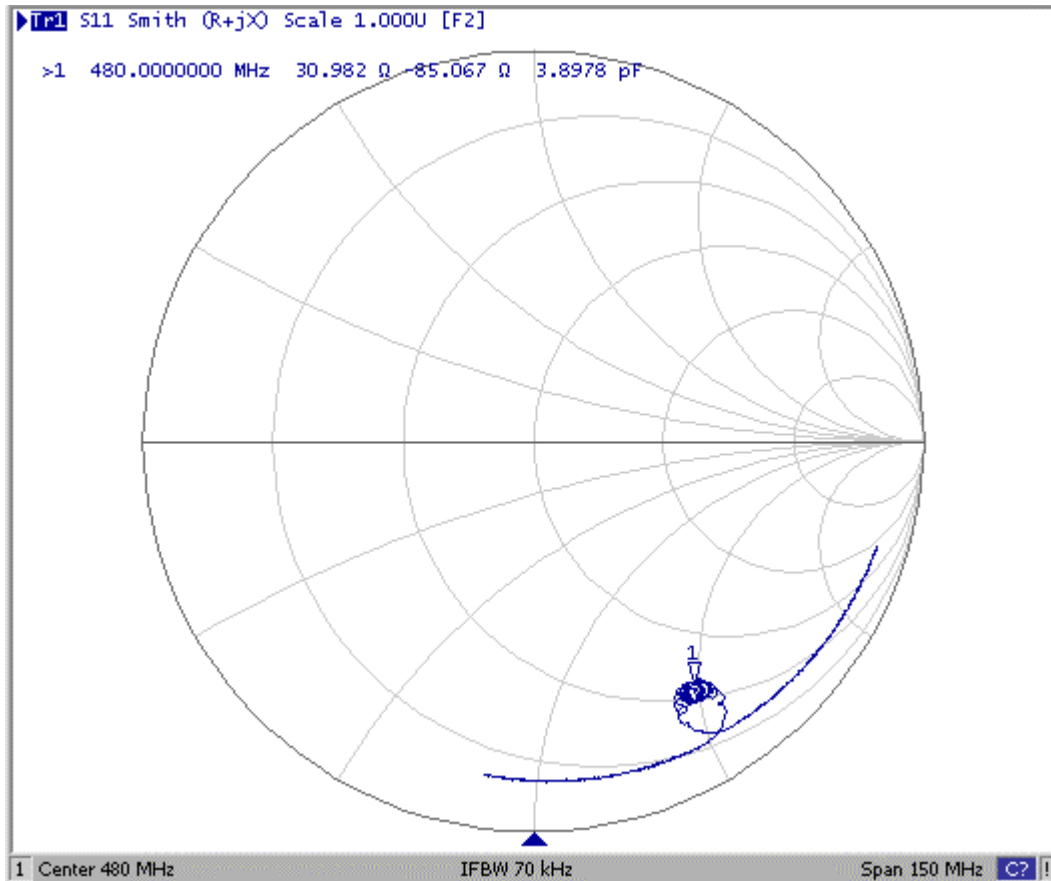

(4) S22 Smith Chart: (span 150MHz)

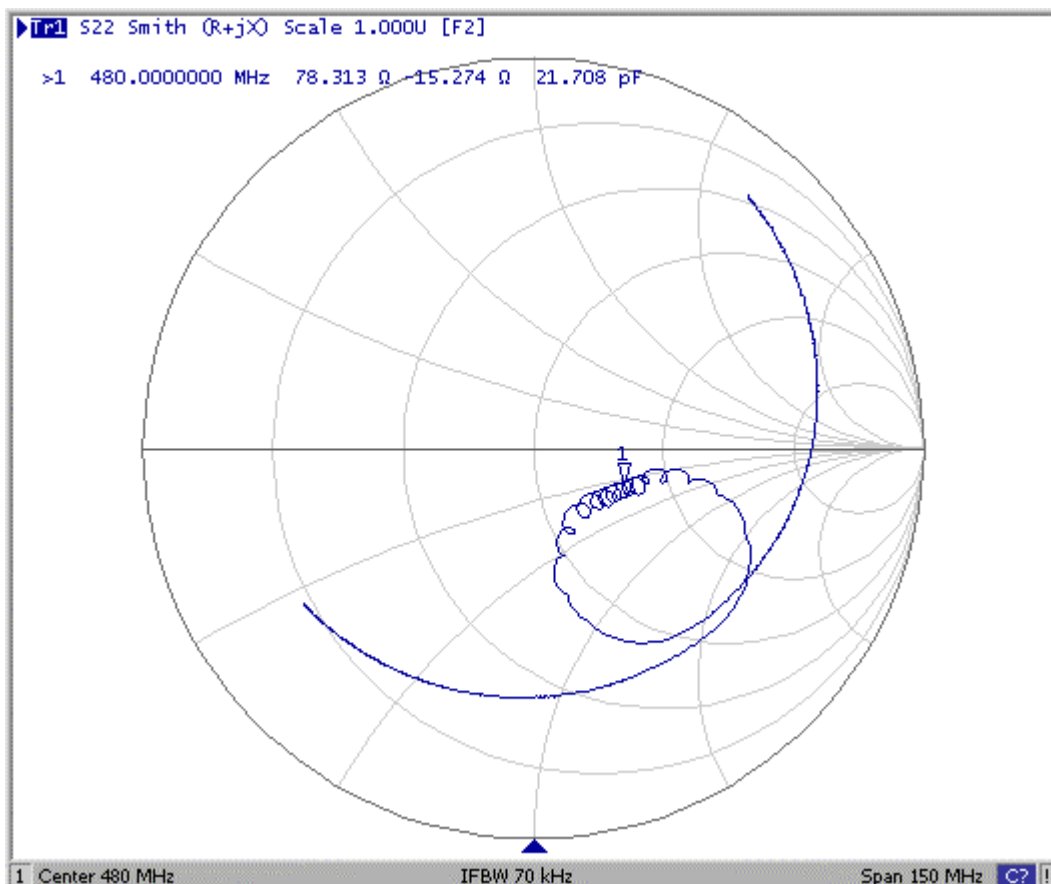


D. TEST CIRCUIT:

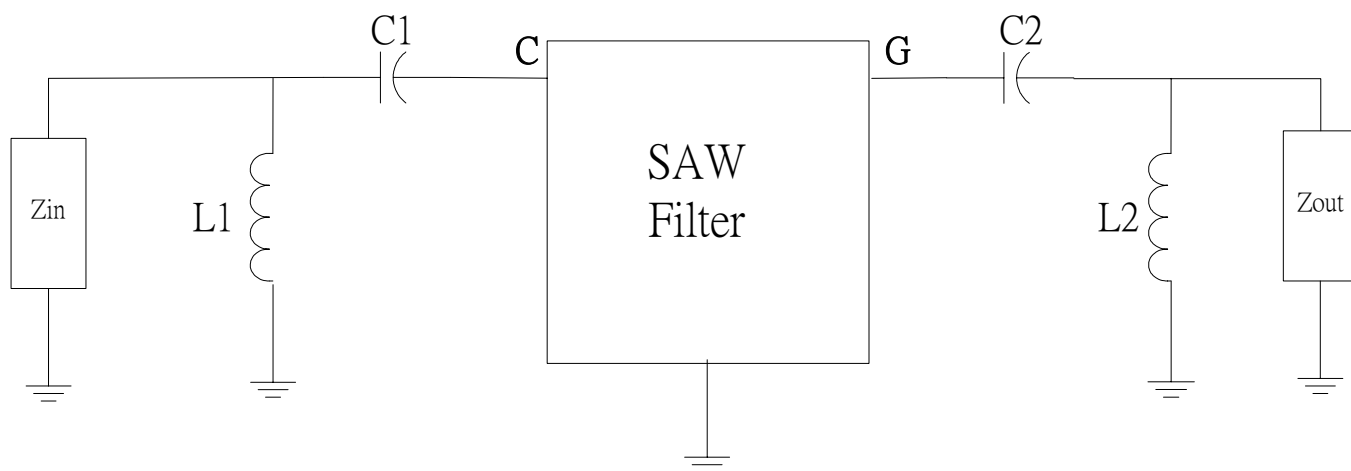

Z_{in} and Z_{out} are 50Ω

$L1=27nH$, $C1=6.8pF$, $L2=10nH$, $C2=30pF$,

E. OUTLINE DRAWING:

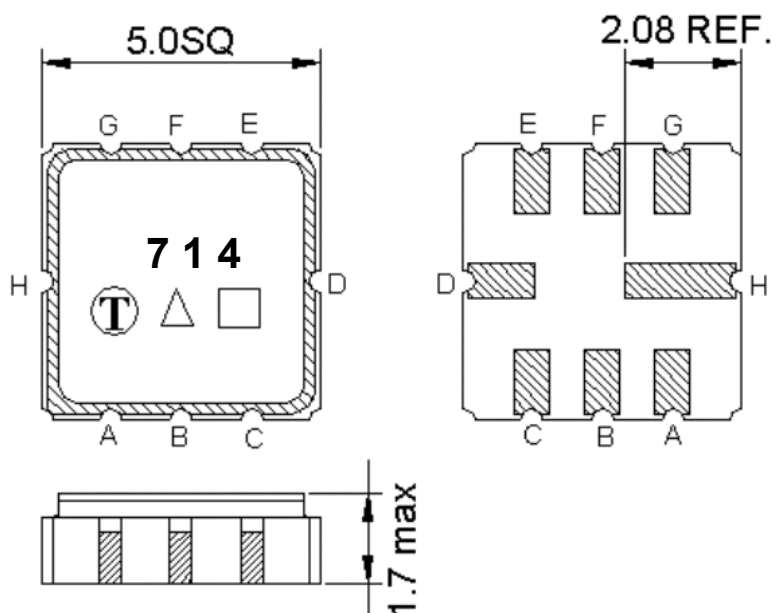

Pin C: RF input

Pin G: RF output

Pin H,D: Case Ground

Pin A, B, E, F: Ground


□ : Week Code (Follow the table from planner each year)

Unit : mm

△ : Product / Year Code


Year	2005 2009	2006 2010	2007 2011	2008 2012
Product Code	B	b	<u>B</u>	<u>b</u>

F.FOOTPRINT:

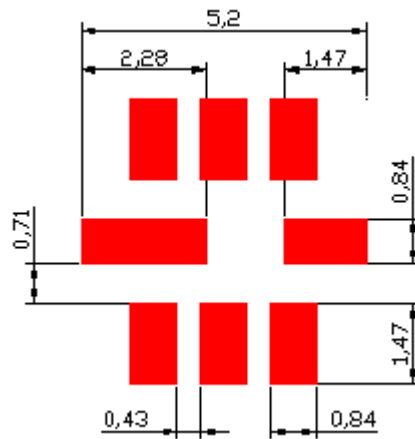


G.PACKING:

1. REEL DIMENSION

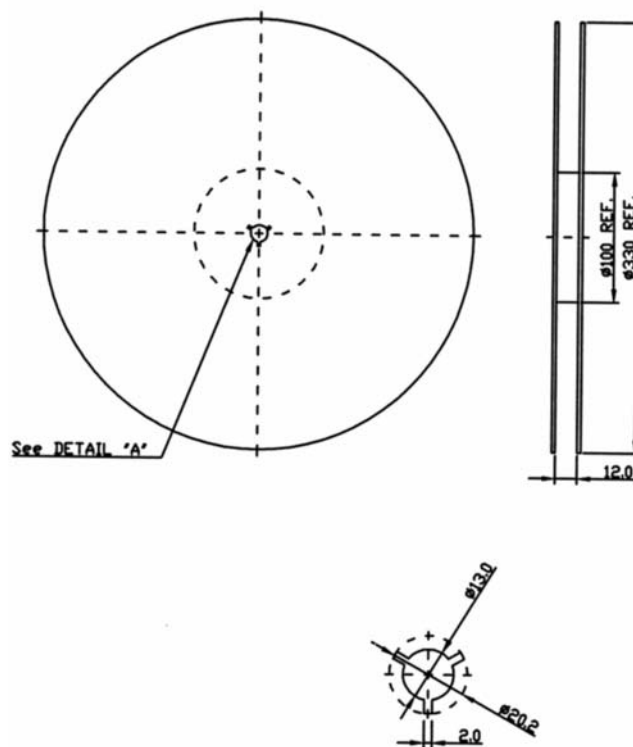

2.TAPE DIMENSION

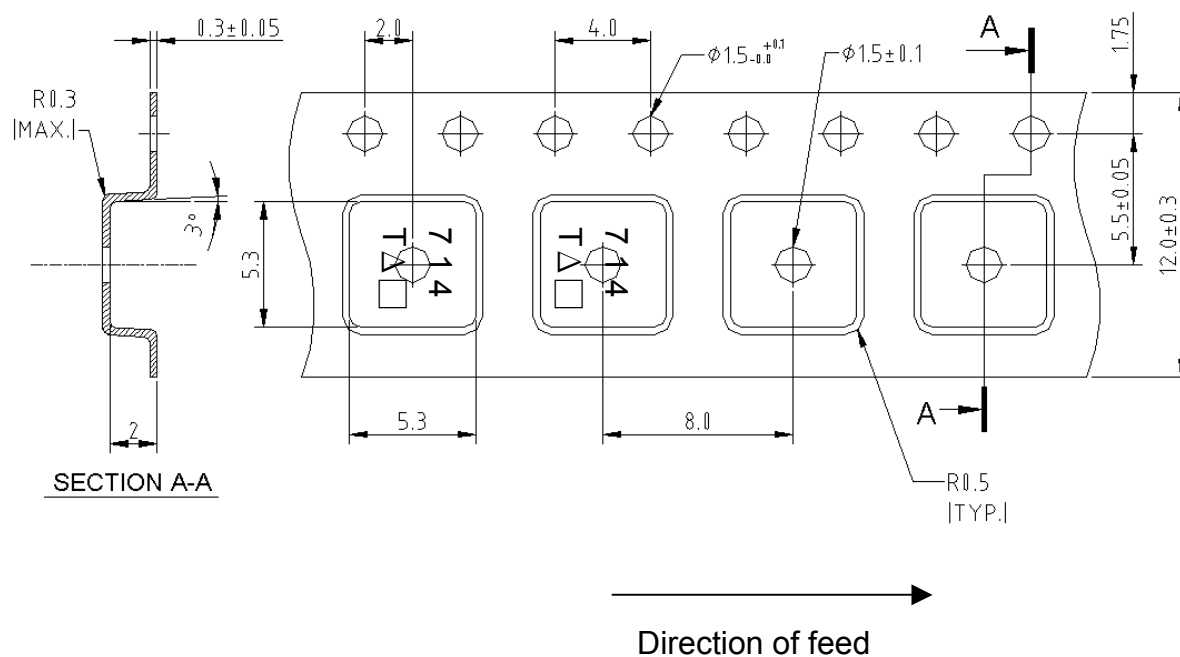

H. Recommended Reflow Profile:

