

DATE	REV	DESCRIPTION	DATE	APPROVED
2/7/08	-	ORIGINAL RELEASE		

**Description:**

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

**Specifications:**

- Frequency Range: 2.0 to 3.0 GHz
- Gain: 30dB Typ.
- Gain Flatness: +/-0.5dB Max.
- Noise Figure: 2.0dB Typ.
- OP1dB: 13dBm Min.
- VSWR Input/Output: 2.0:1 Max.
- DC Voltage Supply: +12 to +15VDC
- DC Current Draw: 140mA Max.

**Features:**

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C

**Available Options:**


- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available

**Environmental Ratings:**


- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C Available)
- Humidity: MIL-STD-202F, METHOD 103B COND B.
- Shock: MIL-STD-202F, METHOD 213B COND B.
- Altitude: MIL-STD-202F, METHOD 105C COND B.
- Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

**PE2 HOUSING WITH CARRIER**

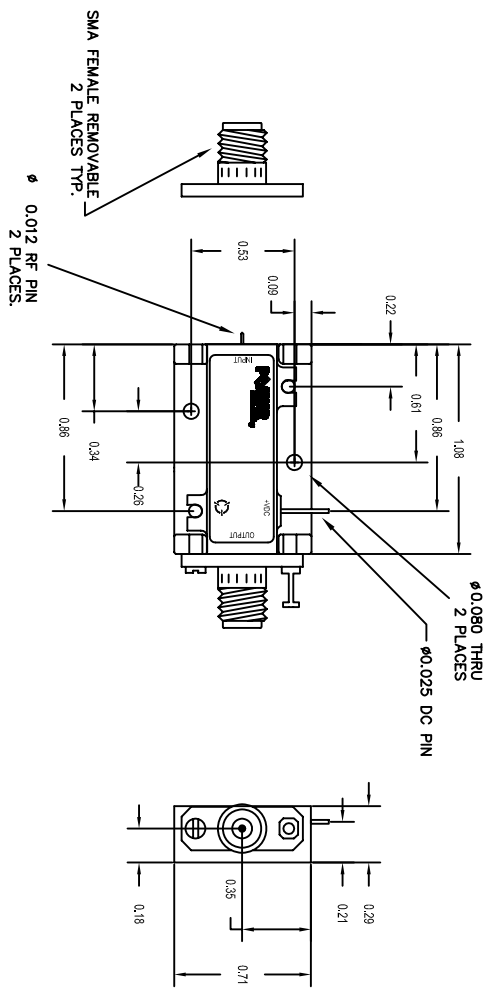

**PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)**

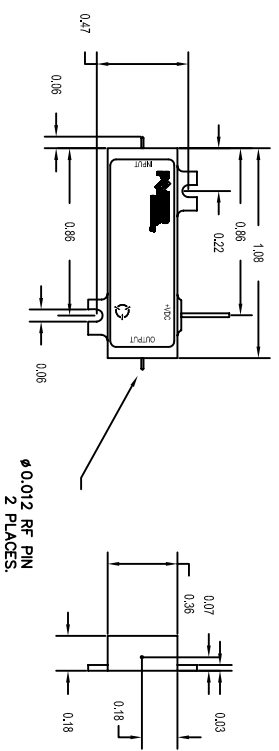

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
FRACTIONS DECIMALS ANGLES  
± .XX ± 0.010 ±  
.XXX ± 0.005

MATERIAL:		6061-T6 Aluminum	
FINISH:		Gold Plate over Nickel	
MATERIAL:		5715 Industry Lot#6, Unit 11	
MATERIAL:		K. MASON	
DATE:		2/21/08	
TITLE:		PRODUCT FEATURE	
PART NO.:		PE2-30-280380-280-15-12-SF	
REV.:		B.1LK53	
WEB:		WEB - MODEL	
REV.:		A	
DATE:		N/A	
REV.:		1 OF 1	