

REV		DATE		APPROVED	
1	2/7/08	ORIGINAL RELEASE			

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

- Frequency Range: 0.5 to 6.0 GHz
- Gain: 45dB Typ.
- Gain Flatness: +/-1.25dB Max.
- Noise Figure: 4.5dB Typ.
- OP1dB: 13dBm Min.
- VSWR Input/Output: 2.0:1 Max.
- DC Voltage Supply: +12 to +15VDC
- DC Current Draw: 200mA Max.

Features:

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C

Available Options:


- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available

Environmental Ratings:


- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)
- Humidity: MIL-STD-202F, METHOD 103B COND B.
- Shock: MIL-STD-202F, METHOD 213B COND B.
- Altitude: MIL-STD-202F, METHOD 105C COND B.
- Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

PE2 HOUSING WITH CARRIER

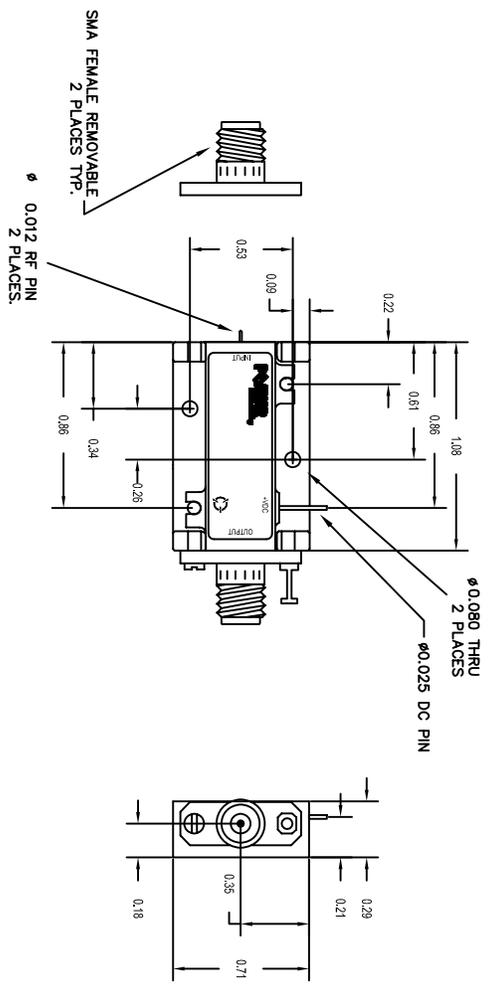

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

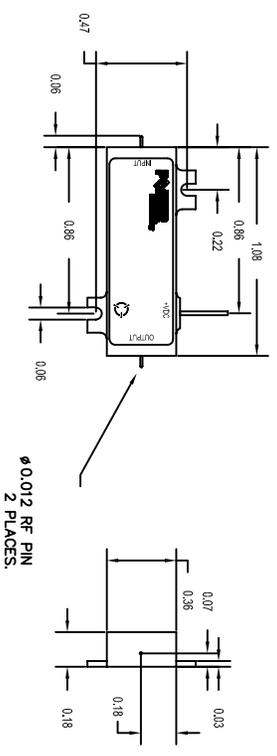

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES ± .XX ± 0.010 .XXX ± 0.005 DO NOT SCALE DRAWING

MATERIAL:		FINISH:		MATERIAL:		FINISH:	
6061-T6 Aluminum	8080	Gold Plate over Nickel	8080	PE2-45-085680-485-15-12-SFF	1LK53	WEB - MODEL	A
MIL-STD-202F, METHOD 103B COND B.		MIL-STD-202F, METHOD 213B COND B.		MIL-STD-202F, METHOD 105C COND B.		MIL-STD-202F, METHOD 107D COND A	