
CRG-B SERIES – BI-DIRECTIONAL COUPLERS

TECHNICAL FEATURE

FEATURES

- 5 to 1500 MHz
- 4-Port
- Multi-Octave
- Minimal Size and Weight
- Hi-Rel Surface Mount Package

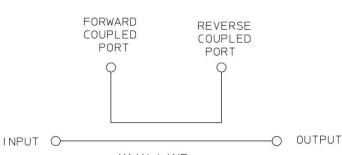

MAIN LINE

PRINCIPAL SPECIFICATIONS								
Model for Vapor Phase & IR Insertion	Frequency Range, MHz	Performance Bandwidth, MHz	¤ Coupling Value, dB, Nom.	Frequency Sensitivity, dB, Max.	Directivity, dB, Min.	*Insertion Loss, dB, Max.	VSWR, In/Out, Max.	
CRG-10B-255	5 - 500	5 - 500	$10\pm\!\!1.0$	± 0.5	20	1.3	1.5:1	
CRG-11B-1005	100 - 1500	100 - 1500 500 - 1000	11 ±1.0 11 ±1.0	$\substack{\pm \ 0.5\\\pm \ 0.5}$	15 15	1.5 1.2	1.7:1 1.5:1	
CRG-20B-1005		100 - 1500 500 - 1000	20 ±1.0 20 ±1.0	± 0.5 ± 0.5	15 15	1.5 1.2	1.7:1 1.5:1	
¤ Coupling is Referenced to the Input * Insertion Loss excludes Coupling Loss								


General Notes:

1. The CRG-B series of bi-directional couplers has both coupled ports available. Units may be ordered with one coupled port terminated internally with coupling values up to 30 dB and with coverage over selected frequency bands up to 2 GHz.

2. These units comply with MIL-C-15370 requirements and can be supplied screened for compliance with specifications you designate for military and aerospace applications requiring higher reliability.

GENERAL SPECIFICATIONS

Impedance:	50 Ω nom.			
CW Input:	1 W max.			
Weight, nominal:	0.07 oz (2 g)			
Operating Temperature:	– 55° to +85°C			

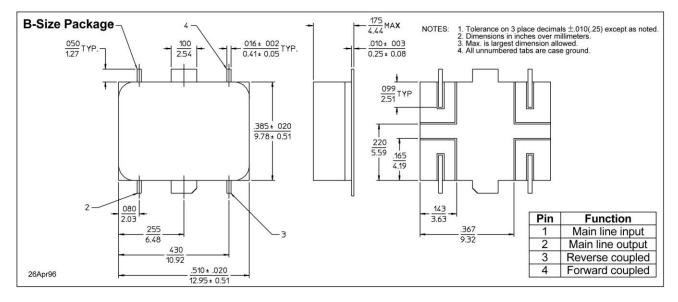

Crane Aerospace & Electronics

Microwave Solutions – Merrimac Industries

41 Fairfield Place, West Caldwell, NJ 07006

+ 1.973.575.1300 ext. 1309 • <u>mw@crane-eg.com</u> www.craneae.com/mw



CRGB.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.