


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

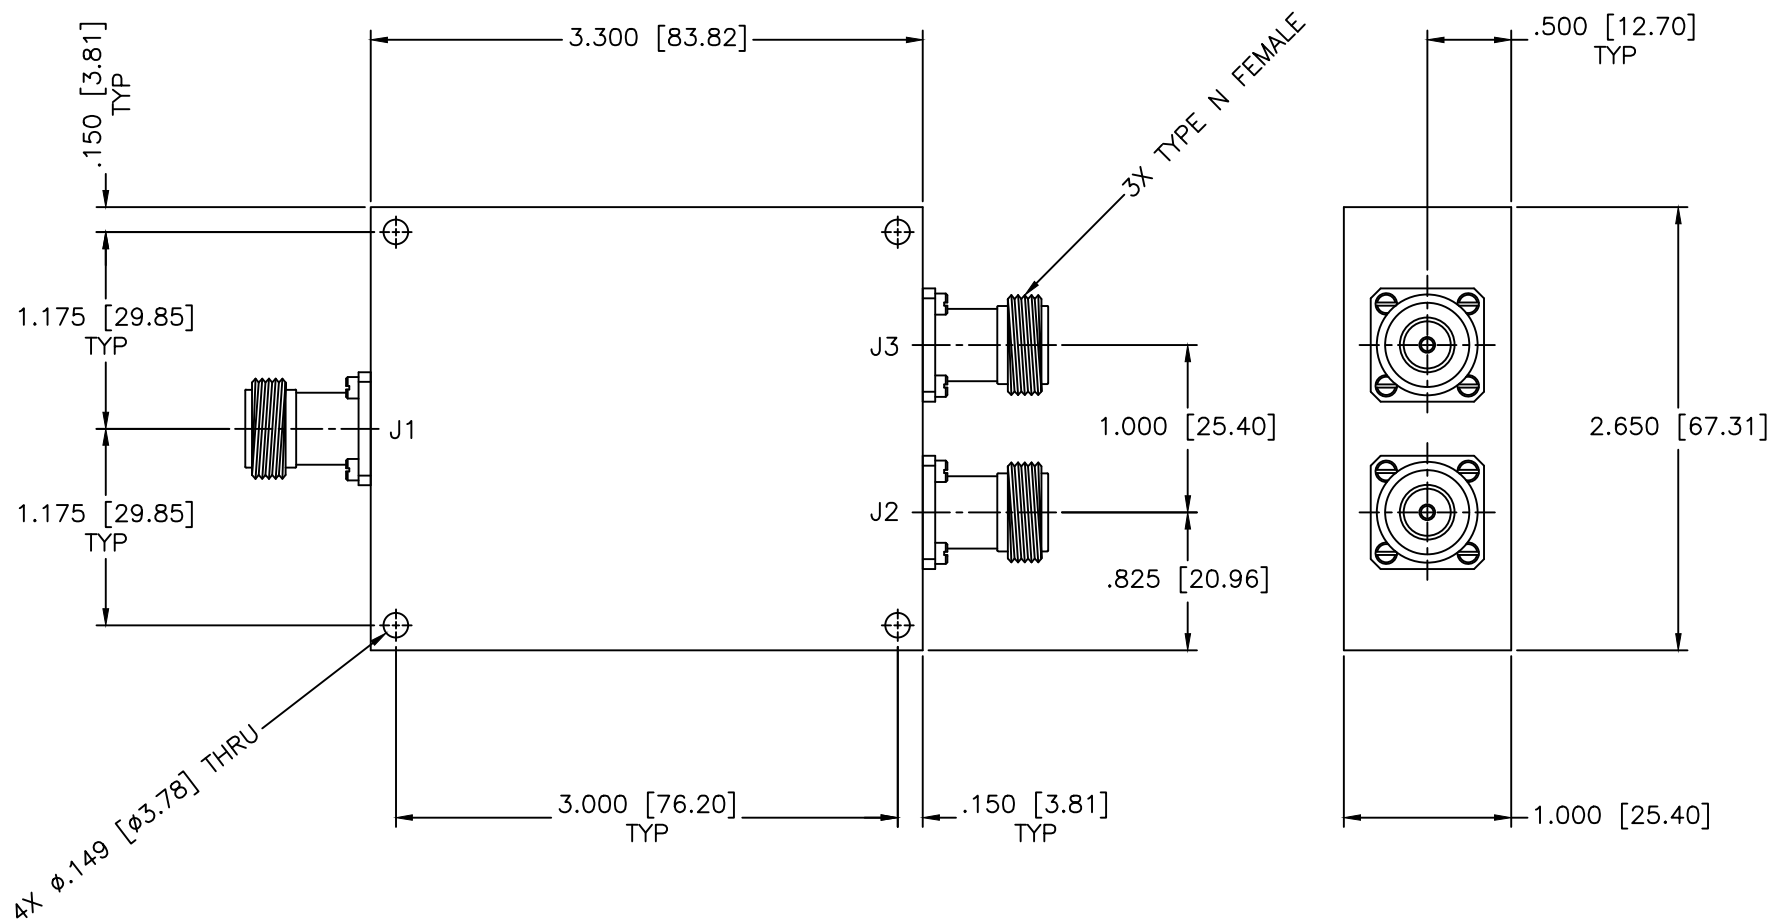

SPECIFICATIONS

Frequency Range: 20–500 MHz
 Insertion Loss: 0.5dB Max.
 Isolation: 25dB Min.
 VSWR: 1.25:1 Max.
 Power: 500 W CW
 Amplitude Balance: ± 0.2 dB Max.
 Phase Balance: ± 5 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER/COMBINER		SHEET: N/A
PART NO.		PLH2-23-500		
CAGE CODE:		SIZE: N/A	REV: N/A	DWG NO. 85291
DO NOT SCALE THE DRAWING				

DRAWN: Poiboon Luethamhan	DATE: 01-31-2011	APPROVED: T. Nguyen	DATE: 01-31-2011
---------------------------	------------------	---------------------	------------------