REV.	DATE	ECR NO.	DESCRIPTION
NC	01/15/10	XXXXXX	INITIAL RELEASE

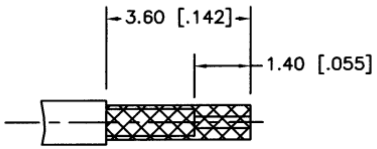

RECOMMENDED
CABLE STRIPPING DIM'S



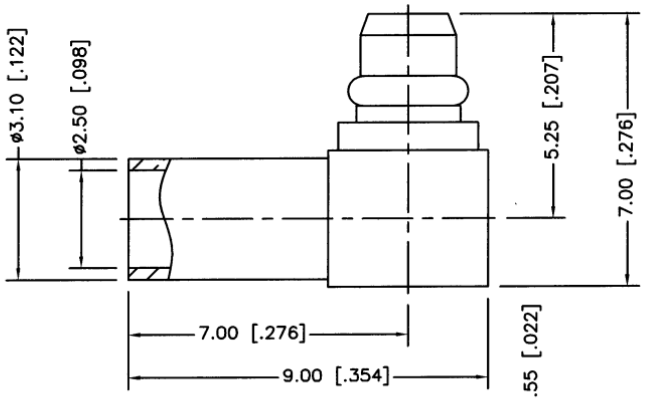





NOTE:
1. CRIMPED FERRULE
   HEX. CRIMP SIZE .105"
2. SOLDER CENTER CONTACT

	DESCRIPTION	MATERIAL	FINISH	QTY
7	INSULATOR	PTFE	NATURAL	1
6	COVER	BRASS	GOLD	1
5	INNER FERRULE	BRASS	GOLD	1
4	RETAINER RING	BER. COPPER	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY WITH HOUSING	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	M.ZHANG	01/15/10
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/CONNEX/262138.DWG	

Amphenol Connex

PART DESCRIPTION: MMCX R/A CRIMP PLUG (FOR 1.13mm CABLE)

PART NO. 262138

DWG. NO. 262138.DWG | REV. NC | SIZE A | SCALE NA