


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

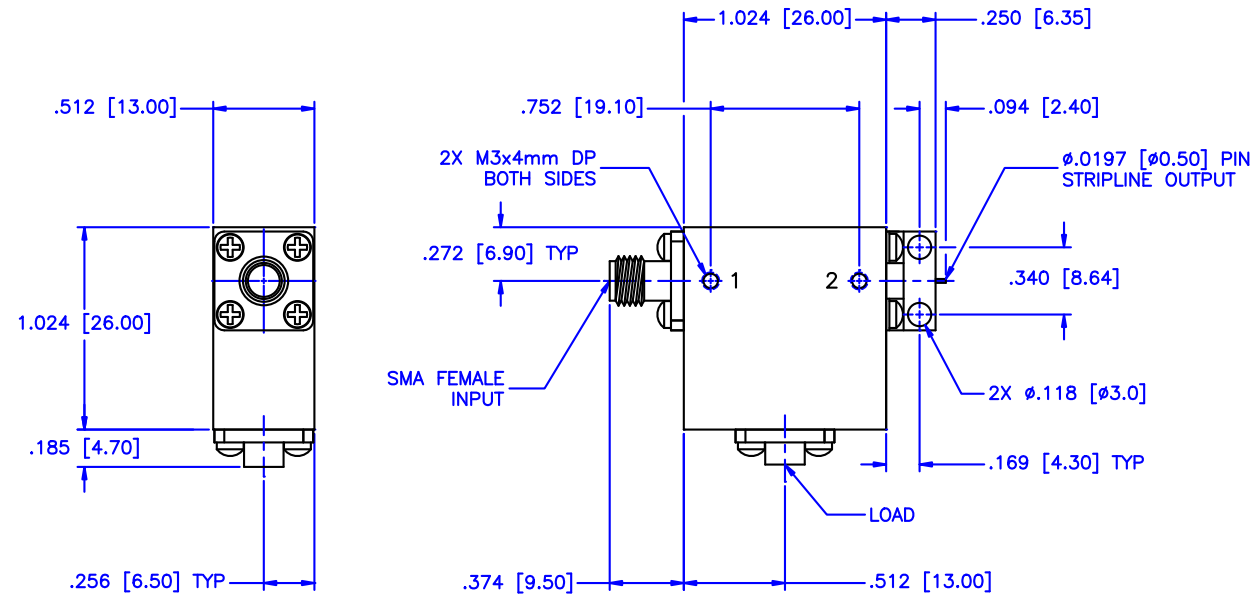

SPECIFICATIONS:

Frequency Range: 2.85–3.30 GHz

Isolation: 20dB Min.

Insertion loss: 0.35dB Max.

VSWR: 1.25:1 Max.

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: STRIPLINE OUTPUT ISOLATOR	
DRAWN: Paiboon Luekhamhan		DATE: 03-12-2009		PART NO. IS-78-PO		SHEET: N/A	
APPROVED: T. Nguyen		DATE: 03-12-2009		CAGE CODE: OD2L5		SIZE: N/A	
				REV: N/A		DWG NO. 84276	
				DO NOT SCALE THE DRAWING			