



RoHS Compliant

LOW PIM ADAPTER

Environmental data

Frequency range : DC ~ 6GHz
 V.S.W.R : 1.20 : 1 Max
 PIMD : 165 dBc min(2x20W)
 Operating Temperature : -45°C ~ 120°C

Connector parts	Materials	Finish
Body	Brass	Suco Plated
Coupling cap	Brass	Suco Plated
Center contact	Brass	Silver Plated
Insulator	TEFLON	—

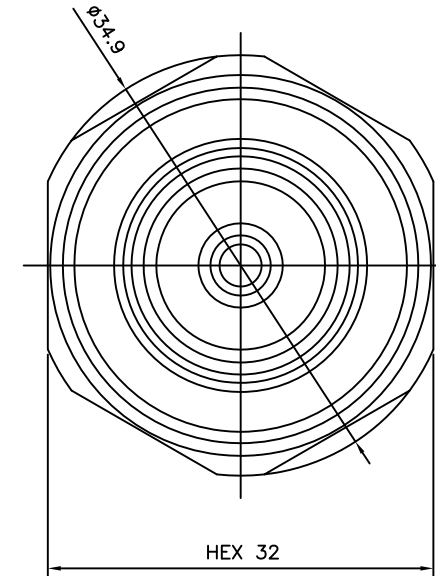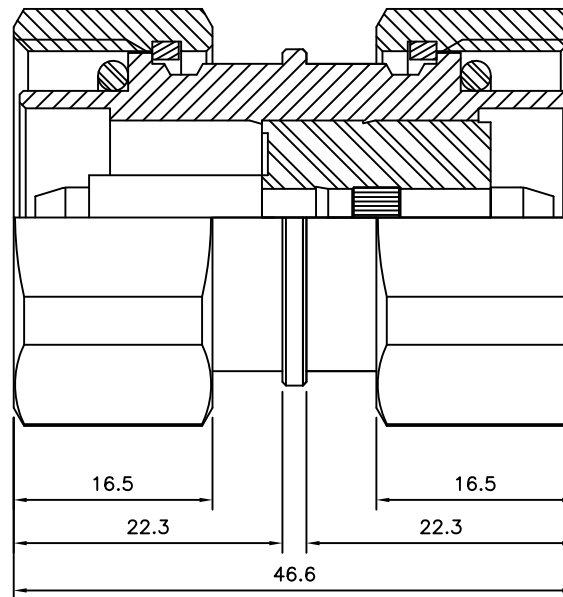

				Drawn: T. P 10/25/13	Title: DIN TYPE(M) TO DIN TYPE(M) ADAPTER									
				Checked: D. H 10/25/13										
Description	Ecn.No	Date	Rev	Approved: S. K 10/25/13										
 Tel:877-777-8432 www.vidaRF.com					Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°					Cage Code 6KQ83	Part No: ADP-3000-309-LP			
										View: 				
										Size: B4	Scale: 4:1	Sheet: 1/1	Rev: A	