




HIGH POWER BRAZED ATTENUATOR

2Y050100

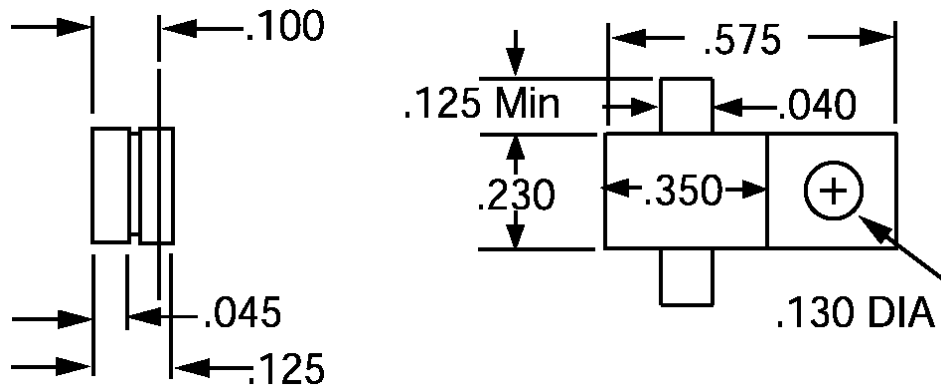

Electrical Specifications		Material Specifications		General Specifications	
RFT P/N	2Y050100	Substrate	BeO	Mechanical Tolerance	±.010"
Power (Watt)	50	Flange	Copper with Nickel Plating	Tolerance (dB)	DC – 1 GHz: ± .5 1-2GHz ± 1
Attenuation (dB)	10	Tab	Nickel with Silver plating	Power Handling	50@ 100°C 0 W @ 250 °C
Frequency (GHz)	2	Cover	Alumina	Construction	Brazed
VSWR	DC – 1 GHz: 1.10:1 1-2 GHz:1.25:11.5:1	Resistive Element	NiChrome	RoHS Compliance	Yes

All dimensions are in inches. Minimum lead length 0.125". Other attenuation and tolerance values available.

2245 Fortune Drive, San Jose, CA 95131
Phone: (408) 433-1941 Fax: (408) 433-1943

Revised:7/17/09