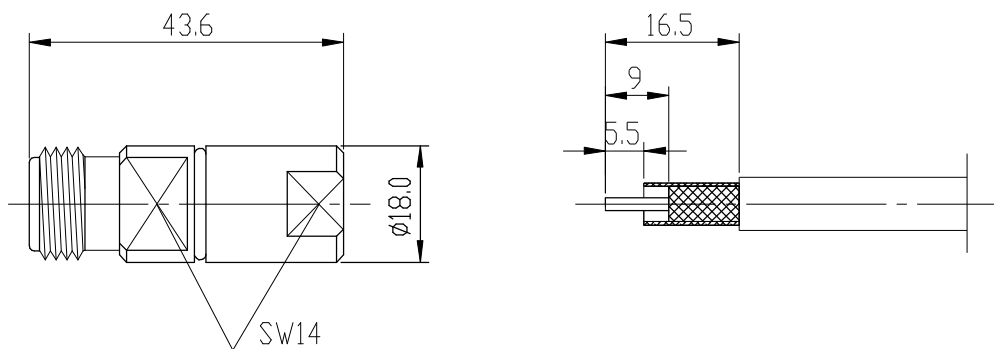


剥线尺寸
stripping dimension

产品型号 type	电缆型号 cable type
N-K634	5D-FB

Electrical Characteristics:

1.Characteristic Impedance: $50\ \Omega$

2.Frequency range: DC~3Ghz

3.Contact resistance

Center conductor: $\leq 1.0\ m\ \Omega$ Out conductor: $\leq 0.2\ m\ \Omega$ 4.Insulation resistance: $\geq 5000M\ \Omega$

5.Insulator withstanding:1500V

6.VSWR: ≤ 1.3

7.Durability: 500cycles

Application:MIL-C-39012/1E

Material&Finishing

1.Center contact :

Female:phosphor bronze,gold plated

2.Bodies and other metal parts:

brass,nickel plated

3.Insulators:PTFE

4.Gasket:silicone rubber

主要性能指标:

1.特性阻抗: $50\ \Omega$

2.频率范围: DC~3Ghz

3.接触电阻:

中心导体: $\leq 1.0\ m\ \Omega$ 外导体: $\leq 0.2\ m\ \Omega$ 4.绝缘电阻: $\geq 5000M\ \Omega$

5.介质耐压:1500V

6.电压驻波比: ≤ 1.3

7.插拔次数: 500次

执行标准:MIL-C-39012/1E

材料和镀层

1.中心接触件:


插孔:锡磷青铜,镀金

2.壳体和其它金属零件:

黄铜,镀镍

3.绝缘子:聚四氟乙烯

4.密封圈:硅橡胶

4. Gasket: silicone rubber				7. 密封圈: 硅橡胶			
		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±			
		1:1					
		NAME		DATE		N-K634 RF COAXIAL CONNECTOR	
DRAWN						西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
CHECKED							
APPROVED							