


Key Features:

- Wide frequency range: 2000-4000MHz partial or full band
- 50 ohm SMA coaxial connectors
- Small size, low cost
- Power handling +25 Watts CW, 250 Watt Pulse Power,
- Operating temperature -20~+65°C

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward CW/Pulse Power, Watts	Temp. Range, °C
F2622-0300-67	2.00-4.00	0.5 Max	≥ 18	≤ 1.35	25/250	-20 ~ +65

Mechanical Structure:

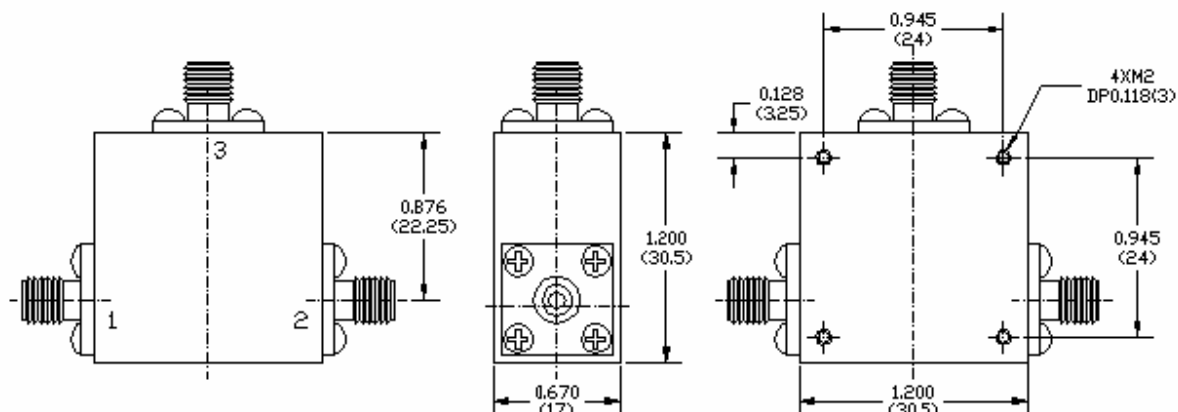

Ordering Information:

F2622-XXXX-XX Note: All units in inches (mm).

↓ ↓

Bandwidth, XX%,

↓

Frequency XX.XX GHz,