

SMA-M RA BRASS RG316DS CRIMP

SC6065

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-6 GHZ
 VSWR 1.33 MAX
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C- +155C


MECHANICAL:

MATERIAL BODY: BRASS
 CENTER CONTACT: BRASS
 CONTACT PLATING: GOLD MIL-G-45204
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348A


ROHS COMPLIANT



CAP



SLEEVE

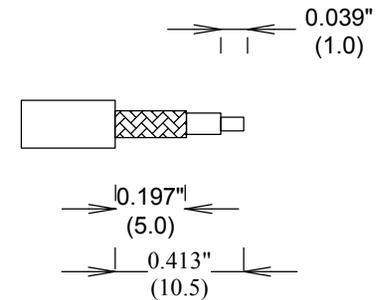

CAPTIVATED CONTACT

STRIPPING DIMENSIONS

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SMA-M RA BRASS RG316DS
CRIMP**

ALL DIMENSIONS IN inches(MM) Typical	SIZE	CAGE CODE	DWG NO	REV
	A	3FKR5	SC6065	--
	SCALE		SHEET	