


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

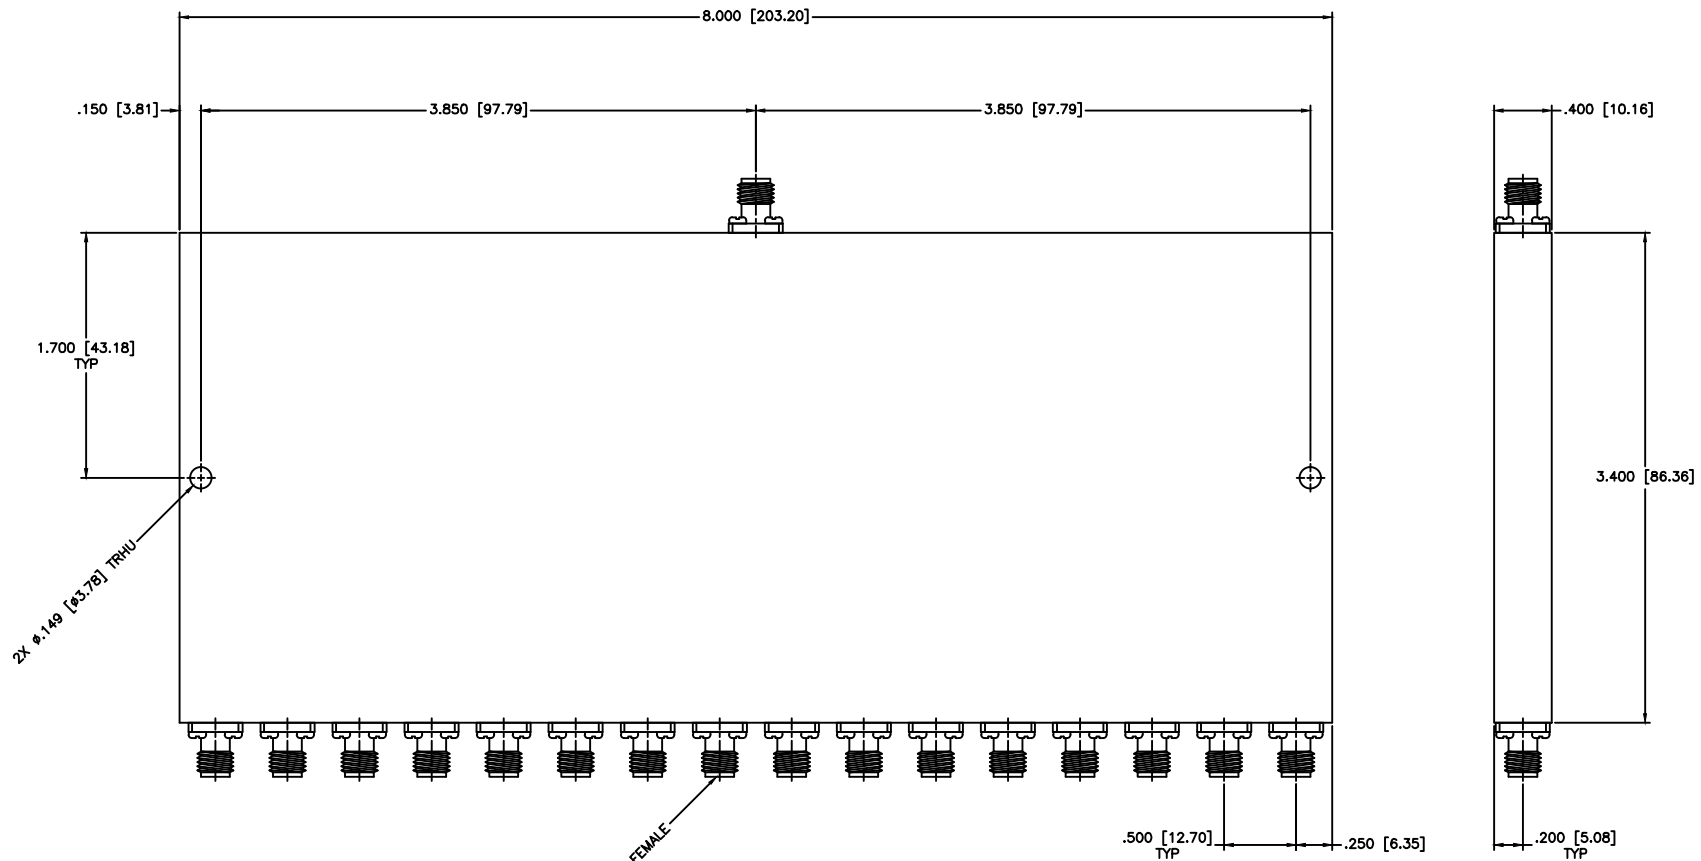

SPECIFICATIONS

Frequency Range: 1–5 GHz
 Insertion Loss: 2.2dB Max.
 Isolation: 14dB Min.
 Phase Balance: $\pm 12^\circ$ Deg. Max.
 Amplitude Balance: ± 1.0 dB Max.
 VSWR IN/OUT: 1.70:1/1.60:1 Max.
 Power Rating: 20W Average, 3kW Peak
 Operational Temperature: -55° to $+85^\circ$ C

17X SMA FEMALE

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A	
			SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 16-WAY POWER DIVIDER		
		PART NO.: PS16-13		
DRAWN: Paiboon Luekhamhan	DATE: 06-04-2012	CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
APPROVED: T. Nguyen	DATE: 06-04-2012	DWG. NO.: 86112		
THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING		