



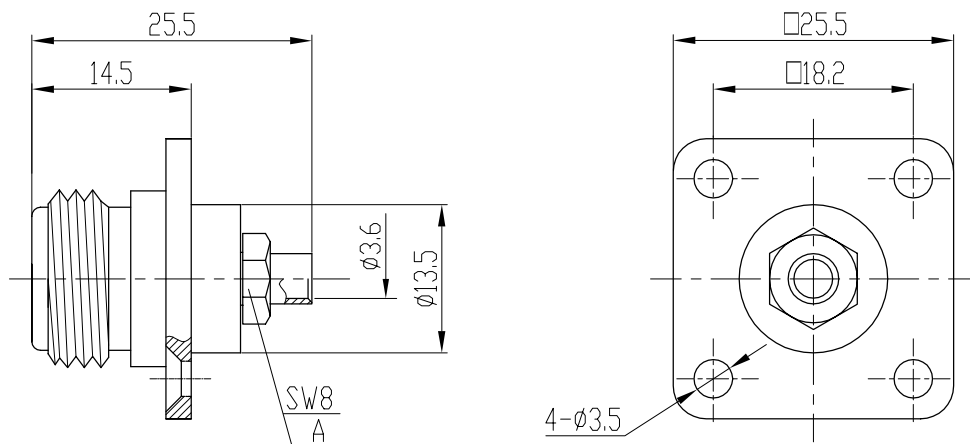

剥线尺寸
stripping dimension

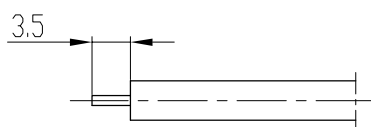

产品型号 type	零件 A part A	电缆型号 cable type
N-KFB3A	黄铜, 镀金 brass, gold plated	SFT-50-3-1、RG402/U

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: ≤1.0 mΩ
Out conductor: ≤0.2 mΩ
- Insulation resistance: ≥5000MΩ
- Insulator withstanding: 1500V
- VSWR: ≤1.5
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: ≤1.0 mΩ
外导体: ≤0.2 mΩ
- 绝缘电阻: ≥5000MΩ
- 介质耐压: 1500V
- 电压驻波比: ≤1.5
- 插拔次数: 500次

Application: MIL-C-39012/1E


执行标准: MIL-C-39012/1E

Material & Finishing

- Center contact :
Female: phosphor bronze, gold plated
- Body: brass, nickel plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 锡磷青铜, 镀金
- 壳体: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		1.5:1		
	NAME	DATE	N-KFB3A RF COAXIAL CONNECTOR	
DRAWN				
CHECKED				
APPROVED			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	