
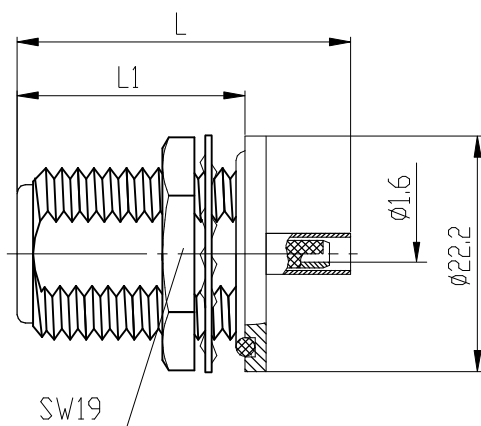


剥线尺寸
stripping dimensions

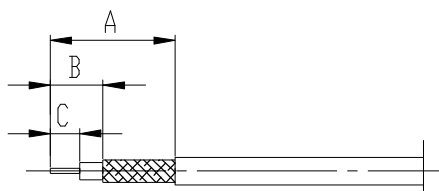

产品型号 type	A	B	C	L	L1	电缆型号 cable type
N-KY3YA	11.8	5.0	2.8	31.5	21.5	RG316DT

Electrical Characteristics:

- Characteristic Impedance: 50Ω
 - Frequency range: DC-4Ghz
 - Contact resistance
Center conductor: $\leq 1.0 \text{ m}\Omega$
Out conductor: $\leq 0.2 \text{ m}\Omega$
 - Insulation resistance: $\geq 5000 \text{ M}\Omega$
 - Insulator withstanding: 1500V
 - VSWR: ≤ 1.4
 - Durability: 500cycles
- Application: MIL-C-39012/1E

Material&Finishing

- Center contact:
Female: phosphor bronze, gold plated
- Bodies: brass, nickel plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

主要性能指标:

- 特性阻抗: 50Ω
- 频率范围: DC-4Ghz
- 接触电阻:
中心导体: $\leq 1.0 \text{ m}\Omega$
外导体: $\leq 0.2 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.4
- 插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 中心接触件:
插孔: 锡磷青铜, 镀金
- 壳体: 黄铜, 镀镍
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

		SCALE
		1.5:1
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

N-KY3YA
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.