


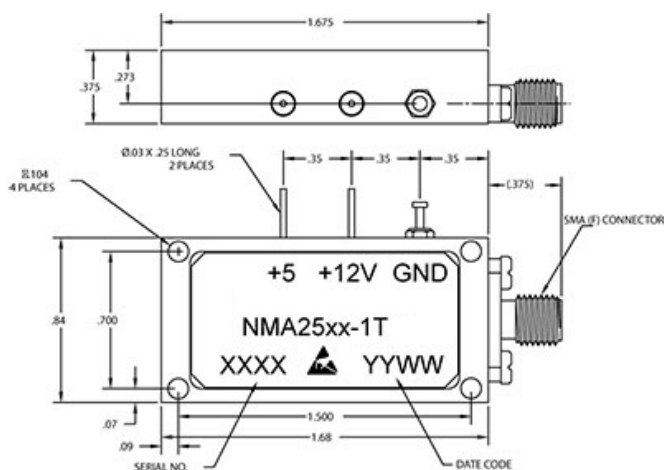


RF Frequency	30 MHz to 3000 MHz
Noise Output	78 dB Min ENR
Noise Spectral Density (N_o)	-96 dBm/Hz Min
Noise Power (N)	-1 dBm
Flatness	3 dB P-P Max
Peak Factor	5:01
Bias Voltage	5 and 12 V
Supply Current	5.0 +/- .1 v @ 300 mA Max 11.8 - 18v @ 25 mA Max
Impedance	50 ohms

Construction	Coaxial
Package Type	T Package
Connector Type	SMA(F)

Operating Temperature	-30 to 85 °C
Storage Temperature	-65 to 95 °C

No TTL Control



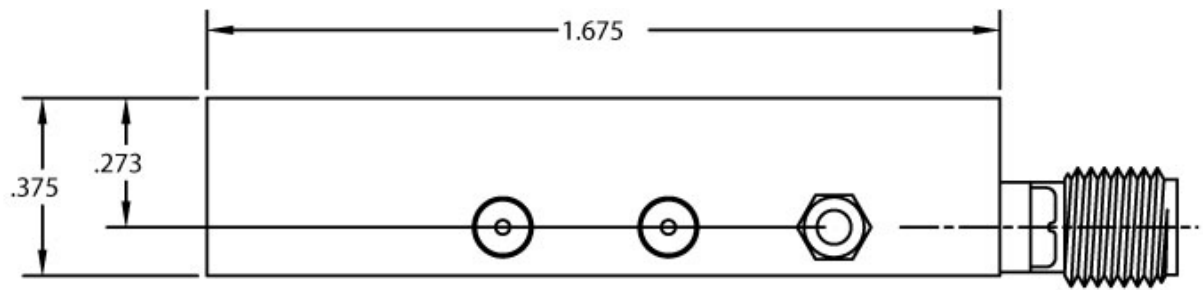

Ø.104
4 PLACES

Ø.03 X .25 LONG
2 PLACES

SMA (F) CONNECTOR

