


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

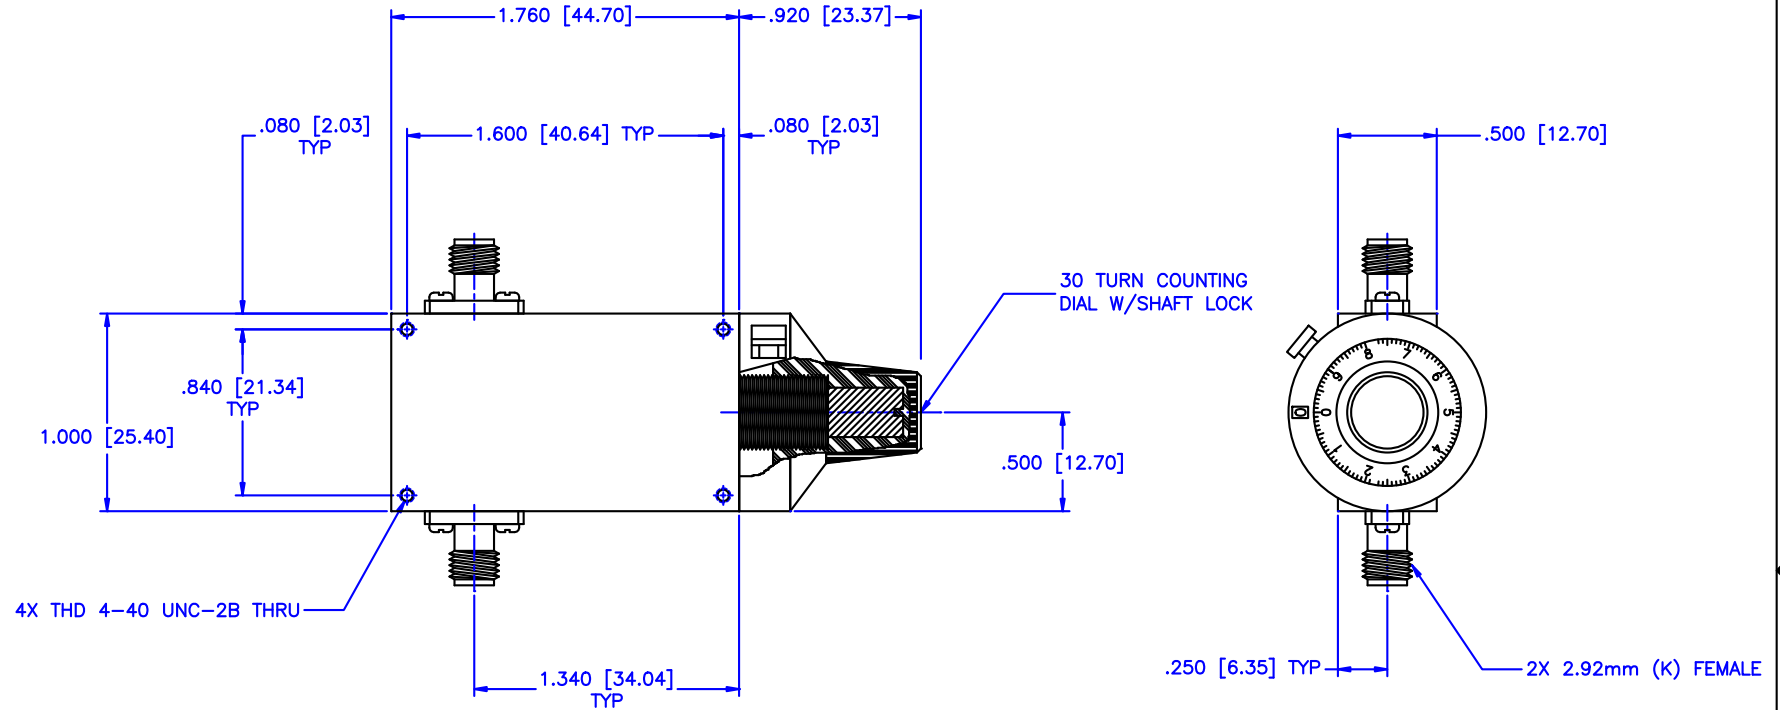

Specifications:

Frequency Range: 26.5–40 GHz
Attenuation: 30 dB
Insertion Loss: 1.5 Max.
VSWR: 2.00:1 Max.
RF Power: 7W Average / 3kW Peak

Environmental

Temperature range: –55°C to +110°C
Shock: 15 G's, 11ms, 1/2 sine
Vibration: 3 G's overall
Altitude: 40,000 ft. Survival 25,000ft Operating

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.015 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: CONTINUOUSLY VARIABLE ATTENUATOR WITH DIAL			
		PART NO. CVA32-30/D			
DRAWN: Paiboon Luekhamhan	DATE: 02-08-2011	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: A
APPROVED: T. Nguyen	DATE: 02-08-2011			REV: N/A	DWG NO. 85451
				DO NOT SCALE THE DRAWING	