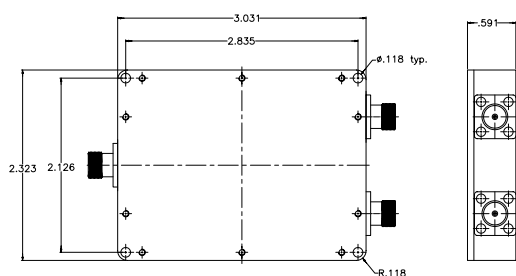
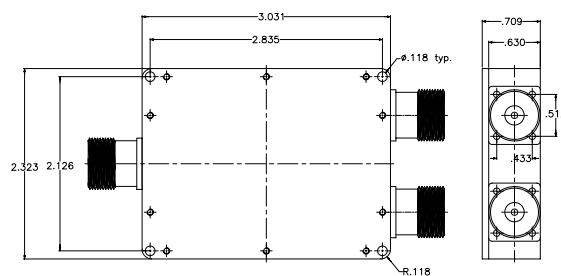


300-500 MHz 2 AND 4-WAY POWER DIVIDERS


Model #	Config.	Frequency	VSWR	Loss	Isolation (min)	Amplitude	Phase	Forward Power	RF Connector
PD-M-030-050-2S	2-way	300-500 MHz	1.2 typ 1.25 max	0.2 dB typ 0.3 dB max	20 dB	+/- 0.2 dB	+/- 4°	30W	SMA
PD-M-030-050-2N	2-way	300-500 MHz	1.2 typ 1.25 max	0.2 dB typ 0.3 dB max	20 dB	+/- 0.2 dB	+/- 4°	30W	N
PD-M-030-050-4S	4-way	300-500 MHz	1.25 typ 1.3 max	0.3 dB typ 0.5 dB max	20 dB	+/- 0.3 dB	+/- 4°	30W	SMA
PD-M-030-050-4N	4-way	300-500 MHz	1.25 typ 1.3 max	0.3 dB typ 0.5 dB max	20 dB	+/- 0.3 dB	+/- 4°	30W	N

(300-500 MHz 2-Way Power Divider)
(SMA)


PART #
PD-M-030-050-2S

(300-500 MHz 2-Way Power Divider)
(N)

PART #
PD-M-030-050-2N

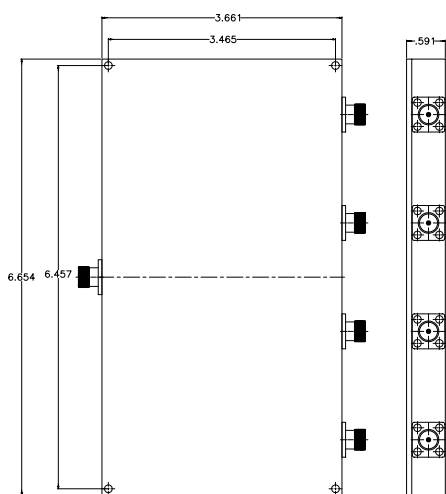(300-500 MHz 4-Way Power Divider)
(SMA)

PART #
PD-M-030-050-4S

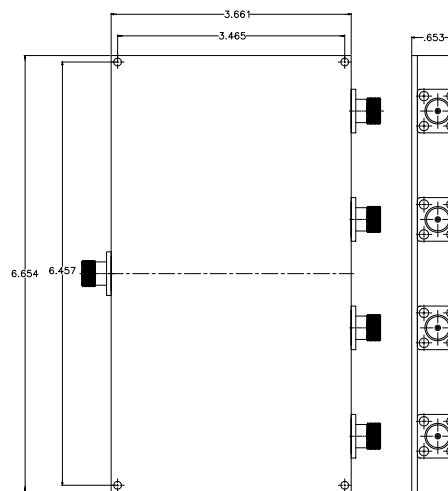(300-500 MHz 4-Way Power Divider)
(N)

PART #
PD-M-030-050-4N