

BRASS* S MOUNT SMP-M FULL DETENTE

SC5370

SPECIFICATIONS:

ELECTRICAL:

FREQUENCY: 0-18 GHZ
 IMPEDANCE: 50 OHMS
 VSWR" 1.3 MAX




MECHANICAL:

MATERIAL BODY: BRASS
 CENTER CONTACT: BRASS
 PLATING: 30 μ-in
 INSULATOR: TEFLON
 INTERFACE: SMP DESC 94007

SMOOTH BORE
 FORCE TO ENGAGE: 10.0 LBS MAX
 FORCE TO DISENGAGE: 2.0 LBS MIN

OP. TEMP RANGE: -55C- +120C

ROHS COMPLIANT

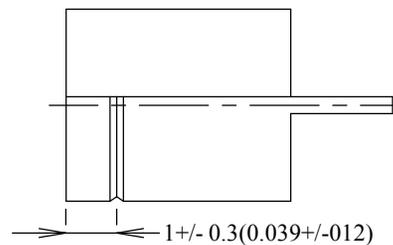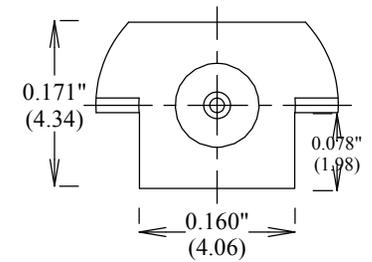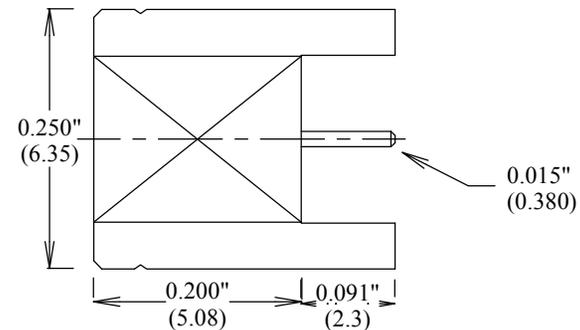

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

BRASS* S MOUNT SMP-M FULL DETENTE

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC5370	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(mm) Typical